

KEI Industries Limited

REGISTERED AND CORPORATE OFFICE:

D-90, OKHLA INDUSTRIAL AREA PHASE-I, NEW DELHI-110020, TEL: +91-11-26818840/8642/0242 FAX: 26817225, 26811959

E-MAIL: info@kei-ind.com WEBSITE: www.kei-ind.com CIN NO: L74899DL1992PLC051527

Manufacturing Units

Bhiwadi
KEI Industries Limited
SP-919/920/922, Ricco Industrial Area,
Phase-III, Bhiwadi, Distt. Alwar-301019 Rajasthan
Tel: +91-1493-220106/221731
Fax: 221731 E-Mail: bhiwadi@kei-ind.com

Pathredi
KEI Industries Limited
Plot No.SP2-874, Ind. Area Pathredi - 301019
Bhiwadi (Alwar) Rajasthan (India)

Silvassa
KEI Industries Limited
99/2/7, Madhuban Industrial Estate, Rakholi,
Silvassa-396230 Dadra & Nagar Haveli
Tel: +91-260-2644404/2630944
Fax: 2645896 E-Mail: silvassa@kei-ind.com

Chinchapada
KEI Industries Limited
Survey No1/1/2/5 Village Chinchapada,
Silvassa - 396230(D.&N.H) Ph.: 7574881215

Chopanki
KEI Industries Limited
A-280/281/282/283/284, Ricco Industrial Area
(Chopanki) Distt. Alwar-301019 Rajasthan
Tel: +91-1493-260202/06 Fax: 260203
E-mail: chopanki@kei-ind.com

Marketing Offices (India)

WEST

Marketing Office-Mumbai
KEI Industries Limited
Nirvan Corporate, 7th Floor, Opposite Aghadi Nagar,
Pump House, Jijamata Road, Andheri East,
Mumbai – 400093
Tel: +91-22-28239673, 28375642
Fax: +91-22-28258277 E-mail: mumbai@kei-ind.com

Ahmedabad
KEI Industries Limited
301, Sarthik Complex, Opp. ISCKON BRTS,
Satellite Road, Ahmedabad-380015, Mob: 9825795673
E-Mail: dharmin.maniar@kei-ind.com,
ahmedabad@kei-ind.com

Pune
KEI Industries Limited
Vasudha Equinox, Office No. 104, 1st Floor,
MoujeBopodi, Near Khadki Railway Station, Pune-411003
Tel: 020-65600891 / 65600892
Mob. +91-9850526730/9823295878/ 9922226699
E-Mail: pune@kei-ind.com

Nagpur
KEI Industries Limited
103, Misal Layout, Near Maharashtra School
Nagpur - 440014
Mr. Saranjeet S. Kohli, Mob: +91-9822473774
E-Mail: nagpur@kei-ind.com

Kolhapur
KEI Industries Limited
776/ 3/6 AmarnathHights Building, Near AmarnathMandir
Ganesh Colony, Kalamba Road, Kolhapur - 416007
Mr. Rajaram B. Kamble
Tel: 9371104263 / 8291918940
E-Mail: kolhapur@kei-ind.com, rajaram.kamble@kei-ind.com

Vapi/Silvassa/Daman
KEI Industries Limited
A1/302, Karmabhumi Residency,
Behind Golden Bakery, Nanakwada, Halar,
Valsad- 396001.
Mr. Harsh Desai, Mob: 9723455316
E-Mail: harsh.desai@kei-ind.com

Raipur
KEI Industries Limited
206, 2nd Floor, Harshit Corporate, Amanaka,
G.E. Road, Raipur, Chhattisgarh - 492001
Mr. Sumit Ganguly - 7581809898
Email: Chhattisgarh@kei-ind.com

Goa
KEI Industries Limited
House no:617, Housing Board Colony,
CamurimMapusa Goa 403507.
Mr. NileshParab
Ph.: 9890452484 E-Mail: goa@kei-ind.com

Solapur
KEI Industries Limited
Niranjan V. Deshpande
462, Om Namah Shivay Nagar,
Kumthe Road, Near Shastri Math,
Hatture Vasti, Solapur. 413005

Rajkot
KEI Industries Limited
Mr. Nitin Tank Mob: +91-8155044144
E-Mail: nltin.tank@kei-ind.com

Nasik
KEI Industries Limited
4, Sanket Apartment, Tidake Colony,
Behind Hyundai Showroom, Nashik,
Maharashtra – 422002
Mob. 8805369705 / 8291918949

Baroda
KEI Industries Limited
803-804, Siddharth Complex, Near Hotel Express
R.C. Dutt Road, Baroda-390007
Tel: +91-265-6539719, 2341831,
9824087943 /9824676443
E-Mail: baroda@kei-ind.com

Surat
KEI Industries Limited
703, Royal Trade Centre, Opposite Star Bazar,
Adajan-Hazira Road, Adajan, Surat-395009
Mob:09879018448, +91-261-2793279
E-Mail: rakesh.patel@kei-ind.com

Aurangabad
KEI Industries Limited
Mahesh Pandurang Akalekar, Flat No. 11, Padmini
Housing Society, Nakshtra Park, Beside Walmi
Naka, Palthan Road, Aurangabad Pin: 431 005
Mob. No. 07045922707/706, 9075008151
E-Mail: aurangabad@kei-ind.com

Gurgaon
KEI Industries Limited
Shop no-101 1st Floor, Radha Palace
Gurudwara Road, Gurgaon Haryana- 122001
Mob: +919873561757
E-Mail: rksingh@kei-ind.com

Noida
KEI Industries Limited A-43 Ground Floor,
Sector-64, Noida, UP - 201301 Ph.:
0120-4315467

Dehradun
KEI Industries Limited
H.No. – 329, Lane No- 13, Mohit Nagar,
Dehradun – 248001 (U.K.), Ph.: 0135 – 2762223.
Mob: 9756621171
Email: depotdehradun@kei-ind.com

Secunderabad
KEI Industries Limited
5-2-510, 2nd floor, plot no:44, Beside Govt Primary
School, Near Bible House, Hyderabad, R.P.Road,
Secunderabad, Telangana- 500 003
Ph.: 8008000583/9963530111
E-Mail:Kiran.kumar@kei-ind.com
vasudeva.rao@kei-ind.com

Coimbatore
KEI Industries Limited
St.no. 581/1a, K.N.G. Pudur Road,
Kanuvai Post S.M. Palayam Village,
Coimbatore - 641 108 Ph.: 8929160629
E-Mail: manohar.s@kei-ind.com

Vijayawada
KEI Industries Limited
Venkata Ramana Enclave, D.No. 48-18-2a/1,
2nd Floor -Nagarjuna Nagar Colony, 6th Lane, Behind
Sai Baba Temple, Besides Ayush Hospital Krishna
Dist., Andhra Pradesh - 520008 Ph.: 8886063715
E-Mail: syed.mahamood@kei-ind.com

Siliguri
KEI Industries Limited
8, Balai Chatterjee Road, Gr. Floor,
Hakimpara, (Opp. Relief Physiotherapy Center)
Siliguri, Dist. Darjeeling, West Bengal, India – 734001
dibyjoyti.karmakar@kei-ind.com
(M# 6292209825)

Kolkata
KEI Industries Limited
Arihanth Benchmark, 4th Floor113-F Matheshwartola
Road Ps:Tiljala, Kolkata: 700 046
Tel: 033 - 4062 0820/4062 0822 Fax: 033 - 40620821
E-Mail: kolkata@kei-ind.com

Korea (Local Representative)
Contact: Mr. CH Han
E-mail: ch.han@kei-ind.com
Contact : +82-10-4351-8585
Mr. TH Park
E-mail: th.park@kei-ind.com Contact : +82-10-9104-4519

NORTH

Jaipur
KEI Industries Limited
Shivam Business Center, 405, 4th Floor,
Calgary Hospital Road, Pradhan Marg,
Malviya Nagar, Jaipur - 302017 (Rajasthan)
Phone No. + 91 141 5179279 Fax: +91 141 252 9404
Mob: +91 99290 93711
E-Mail : jaipur@kei-ind.com

Indore
KEI Industries Limited
Plot No 451 Sch No 78 Industrial Area
New Loha Mandi Dewas Naka Indore 452010 (M.P)

Lucknow
KEI Industries Limited
E-79,80,81 Transport Nagar (Kanpur Road)
Lucknow (UP)-226012, Ph No.-0522-4010752
E-Mail:up@kei-ind.com

Panipat
KEI Industries Limited
C/o Narinder Gupta Mob: +91-8950660777

Chandigarh
KEI Industries Limited
SCO 17, 1st Floor, Swastik Vihar, Mdc, Sector-5,
Panchkula-134109 Tel: +91-172-4416301
Fax: 4416300 E-Mail: chandigarh@kei-ind.com

SOUTH

Chennai
KEI Industries Limited
No.4, (Old, No. 23) SIR C P Ramasamy Road,
2nd Floor, Near Apollo Hospital
Alwarpet, Chennai-600018
Tel: +91-44-42009120
Fax: +91-44-42009130, 8939768405
E-Mail: victor@kei-ind.com, chennai@kei-ind.com

Kochi
KEI Industries Limited
Ground Floor, 71/957 Bava Memorial Building,
Thanikkal, Keerthi Nagar Road, Elamakkara,
PO Kochi (Kerala) - 682026
Ph.: 99470 87535 E-Mail: cochin@kei-ind.com

Bangalore
KEI Industries Limited
No 15, Sirur Park Road, Sheshadripuram,
Bangalore-560020
Tel: +91-80-23466254 +91-80-23466260/55
Ph.: 8884439333 E-Mail: bangalore@kei-ind.com

Hyderabad
KEI Industries Limited
Plot No. 76, H.No. 3-14-52/1, Shubodaya Colony,
Near M.E Reddy Function Hall, Mansoorabad,
Vanasthalipuram, Hyderabad-500070
Tel: +91-40-24024260 +91-9985522558
E-Mail: hyderabad@kei-ind.com

EAST

Bhubaneshwar
KEI Industries Limited
Plot No- 139, 3rd Floor, Rose Dale District Centre,
Chandrashekharpur, Bhubaneswar-751016, Odisha
Tel: +91-9903027514
E-Mail: odisha@kei-ind.com

Patna
KEI Industries Limited
HIG Plot No-4H/59, Bahadurpur Housing Colony,
Lohia Nagar, Agamkuan, Patna 800026, Bihar
Tel: + 91 95348 38038, 7360042598
E-Mail: bihar@kei-ind.com

Guwahati
KEI Industries Limited
Mangalam Plaza Compound, Near North East
Weight BridgeN,H, 37 Bye Pass, Beltola,
Guwahati-781029
e-mail: rubul@kei-ind.com

Ranchi
KEI Industries Limited
Golden Camp Warehouse, Old H B Road
Kokar, Ranchi, Jharkhand - 834001
Contact : 09934011405 / 09810492658
E-Mail : jharkhand@kei-ind.com

Marketing Office (Overseas)

Dubai
KEI Industries Limited
Post Box No. 261739, Jebel Ali Free Zone, Dubai, U.A.E.
Tel: +9714 881 2310, +971 50 2112013 Fax: +9714 881 2311
E-mail: keidubai@emirates.net.ae
Contact: Mr. Shri Tamhankar

South Africa
KEI Cables SA (Pty) Ltd.
1 Benoni Multi Park, 32 Van Dyk Road,
Benoni Ext 12, Gauteng, South Africa
PO Box 501, Boksburg 1460. Mob. No.: +27 65 850 1838

Singapore
KEI Industries Limited
No.52, UBI Avenue 3, # 04-37 Frontier,
Singapore-408867 Tel: +65 83240193
Contact: Mr. Xavier Toh Hong Ghee
E-mail: xavier@kei-sin.com

Nigeria
(Marketing Representative)
E-mail: kunal.gupta@kei-ind.com
Contact : +234 809 9777786



KEI

Wires & Cables

- PVC INSULATED WINDING WIRES

- POLY WINDING WIRES

- 3 CORE FLAT CABLES

FOR SUBMERSIBLE PUMPS

खुशहाली की पहचान, आपके पम्प की जान.



International Copper
Promotion Council India
Copper Alliance




PVC Insulated Winding Wires



Poly Winding Wires



3 Core Flat Cables



Established in 1968, KEI Industries Ltd. is ranked amongst the top cable manufacturing companies of the world. Through its customer focus approach and continuous quest for worldclass quality, KEI has emerged as an industry leader over a period of five decades. KEI is acclaimed for its strong customer support and an efficient marketing and distribution network. It has an evergrowing international footprint with clients spread across 45 countries to date.

Today, KEI enjoys a premium brand imagery serving large infrastructure projects in various fields like refinery, power, petrol chemical, cement, steel, and fertilizers. Along with this, utmost safety standards are practiced, confirming to occupational health and safety management system standards of OHSAS. KEI has four manufacturing facilities in India to manufacture cables from 1.12 KV upto 440 KV. With a comprehensive portfolio designed to meet the needs of clients across sectors and geographies. ISO 9001, 14001, 18001 certifications from DNV of the Netherlands are a testament to stringent quality control measures maintained by the company. Surveillance by a competent team of technocrats and quality enablers, allows KEI to ensure compliance with globally accepted quality standards. Continuous product innovation and cutting edge R&D at its in-house labs, contribute towards constant evolution in products & services.

KEI has the world-class quality, skilled manpower, and most importantly, the technology to ace any new challenge that can come during transmission, distribution, and supply of electrical power. The faith and support extended by its clients usher KEI to serve yet another important and critical application- Submersible Pump motors – through PVC & Poly Winding Wires.




PVC INSULATED WINDING WIRES

KEI's PVC Insulated Winding Wires for Submersible Pumps serve many submersible pump manufacturers and thousands of rewinders across India with fine quality products.

KEI's Winding Wire is insulated with a superior grade of PVC compound as per IS 5831 to give it the needed electrical strength and resistance to abrasion. The copper conductors used by KEI are of the highest level of purity and conductivity. These conductors are also annealed to stringent specifications.

Precautions

Although due care is taken in the handling of winding wire from manufacturing to packaging stage, this product being delicate, proper care is also needed during handling, storage and its insertion into stator slot to ensure desired product performance.



HR PVC INSULATED WINDING WIRE: AS PER IS 8783 (Part4/Section 1):1995 SOLID COPPER CONDUCTOR

Nom. Conductor Diameter (mm)	Min. Insulation Thickness (mm)	Overall Diameter Approx. (mm)	Conductor Resistance at 20° ohms/km Max	Weight Per KM (Kg)
0.60	0.25	1.15	62.20	3.60
0.70	0.30	1.35	45.70	5.00
0.80	0.30	1.45	35.00	6.10
0.90	0.30	1.55	27.60	7.50
1.00	0.30	1.65	22.40	9.00
1.10	0.30	1.75	18.50	10.60
1.20	0.30	1.85	15.50	12.30
1.30	0.30	1.95	13.20	14.30
1.40	0.35	2.15	11.40	16.70
1.50	0.35	2.25	9.95	19.00
1.60	0.35	2.35	8.75	21.20
1.70	0.35	2.45	7.75	23.90
1.80	0.35	2.55	6.91	26.40
1.90	0.35	2.65	6.20	29.20
2.00	0.45	2.95	5.60	33.20
2.10	0.45	3.15	5.08	36.40
2.20	0.45	3.25	4.63	39.40
2.30	0.45	3.45	4.23	43.00
2.40	0.50	3.55	3.89	47.00
2.50	0.50	3.65	3.56	51.00
2.60	0.50	3.75	3.31	54.40
2.70	0.50	3.85	3.07	59.20
2.80	0.55	3.95	2.86	63.30
2.90	0.55	4.05	2.63	68.40
3.00	0.55	4.15	2.49	72.80

1. Specific Length can be supplied as per customer requirement. 2. Overall Diameter can be increased as per customer requirement. 3. Tolerance of Outer Diameter is (+/-) 0.05 mm.

POLY WRAPPED WINDING WIRES

KEI proudly presents the Poly wrapped winding wire commonly known as “SUBMERSIBLE COPPER WINDING WIRE.” The copper conductor is wrapped with thin polyester film & Biaxial Oriented Poly Propylene (BOPP) films. The modern plant with sophisticated wrapping heads & inline continuous heat shrinkage furnace is installed to get uniform covering. A complete quality assurance testing by instruments covering all governing standards is available. The test standards followed are IS 8783:1995.



APPLICATION

Used in submersible pump motors of all sizes for domestic and industrial applications.

PACKINGS

Available in coil form with sustainable length as per size, in polythene bag and packed in inner & outer corrugated boxes.

SPECIAL SALIENT FEATURES


- Saves energy - ETP grade high conductivity annealed copper used
- Less current leakage - No air gap between the films
- Tear resistant - High mechanical strength - High tensile strength
- Each coil tested at 3500 V
- Heat shock test at 150°C
- Easy winding - Resistance annealed copper and controlled OD
- Manufactured by ultra modern automatic plant as per IS 8783 (Part 4/sec 3)

TESTING FACILITIES FOR SUBMERSIBLE WINDING WIRES

The quality assurance having all testing facilities with ultra modern, high precision instruments and rigorous testing plants. Details of test which conforms to IS 8783 (Part 4/sec 3) is as follows.



S.No.	Name of the Tests	Units	Testing Instruments used
1	Size (Diameters)	mm	Digital Micrometers
2	Elongation	Percentage	Tensile tester
3	Conductor Resistance	Ohm/Km	Resistance Meter
4	Volume Resistivity	Ohm-cm	Million mega meter
5	High Voltage Test	Kv	High Voltage tester
6	Thermal Ageing	Change in Elongation & tensile	Ageing Oven & tensile tester
7	Shrinkage Test	Percent	Circulating Hot air oven
8	Water Absorption	mg/cm ²	Vacuum Oven & Pump Desecrator
9	Hot Deformation	Percent	Circulating Hot air oven
10	Heat Shock test	No sign of Cracks/scales/ separation of layers	Circulating Hot air oven & Mandrels



POLY WRAPPED WINDING WIRE:
As per IS 8783 (Part4/Section 3): 1995 SOLID COPPER CONDUCTOR

Nom. Conductor Diameter (mm)	Tolerance +/- mm	Overall Diameter Approx. (mm)	Conductor Resistance at 20° C ohms/km Max	Weight Per KM (Kg)	Elongation Minimum (%)
0.50	0.005	0.82	87.78	2.04	25
0.60	0.006	0.92	60.96	2.86	26
0.70	0.007	1.02	44.78	3.84	28
0.80	0.008	1.12	34.29	4.96	28
0.90	0.009	1.25	27.09	6.36	29
1.00	0.010	1.42	21.94	7.75	30
1.10	0.011	1.52	18.14	9.28	30
1.20	0.012	1.62	15.24	10.95	31
1.30	0.013	1.72	12.98	12.76	32
1.40	0.014	1.82	11.20	14.71	32
1.50	0.015	1.92	9.75	16.80	32
1.60	0.016	2.02	8.57	19.02	32
1.70	0.017	2.22	7.59	21.72	32
1.80	0.018	2.32	6.77	24.25	32
1.90	0.019	2.42	6.08	26.91	32
2.00	0.020	2.52	5.49	29.71	33
2.10	0.021	2.62	4.98	32.66	33
2.20	0.022	2.72	4.53	35.74	33
2.30	0.023	2.82	4.15	38.97	33
2.40	0.024	2.92	3.81	42.32	33

1. Specific Length can be supplied as per customer requirement.
2. Overall Diameter can be increased as per customer requirement
3. Tolerance of Outer Diameter is (+/-) 0.05 mm.





SUBMERSIBLE FLAT CABLE
(THREE CORE) FOR VOLTAGE
UP TO 1100 V AC

- Fits perfect required Grommet
- As per IS dimension
- Perfect sheathing for underwater application


Technical Specification

Conductor: Nicely bunched high purity bright, electrolytic grade, plain annealed copper with superb flexibility according to harmonized grades H05V-K, H07V-K, BS 6360 class 5 available in various sizes.

Insulation & Sheathing: Generally available with general purpose insulation and normal PVC sheathing, choice of insulation and sheathing is available on special order.

Three core flat flexible industrial cable for submersible pump motors,
1100 voltage grade

Nominal Cross Sectional Area (Sq.mm)	Number of wires / Nom. Dia of strand*	Nominal Insulation Thickness (mm)	Nominal Insulation Thickness (mm)	Maximum Overall Diameter(mm)		Max. DC Conductor Resistance at 20°C 3Phase a.c.	#Current Rating , Amps at 40°C 3Phase a.c.	Voltage Drop (mV/A/m)
				Width (W)	Height (H)			
				[Ω/km]				
1.5	30/ 0.25 mm	0.7	0.9	10.7	5.3	13.3	14	28
2.5	50/ 0.25 mm	0.8	1.0	13	6.2	7.98	20	17
4	56 / 0.3 mm	0.8	1.0	15.3	7.1	4.95	26	10.5
6	84 / 0.3 mm	0.8	1.1	19.2	8.4	3.30	34	7.0
10	80/ 0.4 mm	1.0	1.4	24.2	10.4	1.91	47	4.2
16	126/ 0.4 mm	1.0	1.4	29.0	12.4	1.21	63	2.6
25	196/ 0.4 mm	1.2	2.0	36.5	15.7	0.780	81	0.154
35	276/ 0.4 mm	1.2	2.0	40.5	17.2	0.554	100	0.154

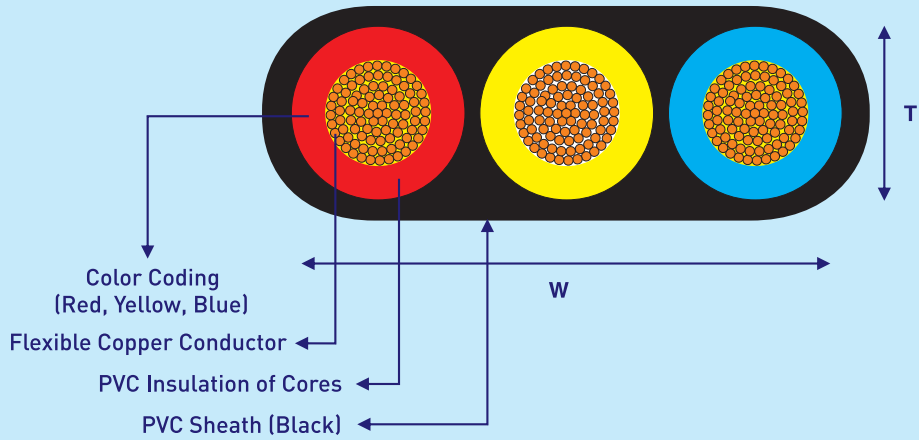

HP	Amp
5	7.5
7.5	11
10	14.9
12.5	18.9
15.5	22.5
17.5	25.2
20	28.4
25	35.6
30	42.3
35	50.4
40	58.1
45	62.1
50	67.5
55	73.8
60	81
65	87.3
70	93.6
75	100.8
80	108



- 1) **HP Vs Current:** The full load current for submersible pump motors, 3 phase, 50 cycles, 415 - 425 V
- 2) **Derating Factors:** Multiply the current carrying capacity of the cable by factors given below for various ambient temperatures.

Ambient Temperature °C	30	35	40	45	50
Rating Factor	1.09	1.04	1	0.95	0.77

Notes:

Current ratings are given considering max. conductor operating temperature of 700C

*The number and diameter of conductor strands are for reference only. Conductor resistance as per IS : 8130 is the governing criteria. The above data is indicative and may be revised without prior intimation.

Standard Coil length is 100 mtrs; longer lengths & 3C x 50 Sq.mm, 3C x 70 Sq.mm, 3C x 95 Sq.mm
Sizes are available on request. KEI will not be responsible for any damages arising out of incorrect application of it's product.