

# PRODUCT CATALOGUE



**KEI**  
**Wires & Cables**

KEI has been at the forefront of India's wire and cable Industry for more than 5 decades. We manufacture a range of specialized cables and are important players in the domestic and retail segment. Our unblemished track record has earned us the patronage of leading Industrial houses, project consultants and architects. In order to provide reliable and expedient services to our customers, we have created manufacturing facilities at Silvassa, Chopanki, Bhiwadi, Pathredi and Chinchpada. Today, KEI is a one-stop-shop when it comes to meeting cabling requirements for the domestic, power and Industrial sectors. KEI has earned a formidable reputation by nurturing relationships, ensuring timely execution of orders and becoming a reliable partner in executing client projects. Our uncompromised cost-effective quality and reliable product range that meets rigorous technical requirements of our customers has made us an undisputed industry leader.

KEI carries out stringent quality control measures under surveillance of a competent team of technocrats and quality enablers. Continuous product innovations and cutting-edge R&D at KEI's in-house labs are what contribute towards constant evolution in our offerings and services. All KEI wires and cables are of a superior quality, a reason why they have been accredited and certified by Testing Agencies across the globe. KEI also has a substantial international presence with a global spread of clients spreading across 45 countries.

An ISO 9001:2015 certified company; KEI carries out stringent quality control measures under surveillance of a competent team of technocrats and quality enablers. Continuous Product Innovations and cutting-edge R&D at KEI's in-house labs is what contributes towards constant evolution in our offerings and services. All KEI's cables and wires are of a superior quality, a reason why they have been accredited and certified by Testing Agencies across the globe.



### MANUFACTURING FACILITIES

A large infrastructure, spread over an area of 2,49,576 sq. metres across three strategically located units, supported by state-of-the-art production units, gives KEI the strength to meet the varied needs of its wide client base. No wonder KEI caters to over 100 large Indian companies covering almost all the industrial sectors.







## CLIENTS AND SECTORS

### MINING

- SECL
- WCL
- ECL
- Hindustan Zinc
- Marble Industries
- Birla Copper

### FERTILIZERS

- National Fertilizers Ltd
- Indo Gulf Fertilizers
- Indian Farmers & Fertilizers Corporation
- Gujrat State Fertilizers Co-operative Corporation
- Chambal Fertilizers
- Deepak Fertilizers
- Zuari Agro
- Rashtriya Chemicals and Fertilizers
- Tata Chemicals
- Hindustan Fertilizers Co. Ltd.

### TELECOMMUNICATION

- Bharat Sanchar Nigam
- Basic Operators and Telecom Networking Engineers
- Cyprus Telecommunication
- Spice Telecom
- Marconi
- Secure Meters
- Reliance Infocomm
- Defence

### INTERNATIONAL EPCS

- ABB
- McDermott
- VA Tech Hydro and VA Tech Flowel
- SIEMENS
- Mitsui
- Doosan
- SAMSUNG
- Itochu
- Hyundai
- LG
- Punj Llyods
- EIL
- TOYO
- BHEL
- Bechtel
- TECHNIP
- Larsen and Toubro
- TICB
- PETROFAC
- Skanska
- Alstom / Areva
- Briggs and Burton

### GLOBAL SUPPLIES

- Ireland Blyth Ltd., Mauritius
- 400 KV Switchyard Project Stage-1
- Industrial Pumps, Philippines
- Rey and Lenferna Ltd., Mauritius
- Baji Iraq
- BK Overseas, Uganda
- Bahri and Mazroei Trading Co., U.A.E
- Gulf Incon Doha, Qatar
- Joba Trading
- Abu Dhabi Commercial Corporation, U.A.E
- Oman Cable Industry, Muscat, Oman

- Min. of Electricity and Water, Bahrain
- Ministry of Finance, Dubai
- J Ray McDermott East Inc., Dubai
- Kuwait National Petroleum Corporation
- Cyprus Telecom. Authority, Nicosia, Cyprus
- Modern Electrical, Trinidad
- Kahrama, Qatar
- Al Hamas
- Innovative Technologies, Dubai
- Qatar Petroleum
- SEWA, Sharjah
- Systems Building, Mauritius
- Sohar Aluminium, Dubai
- FEWA
- PPC Ltd., Canada

### PRIVATE PROJECTS

- IBM
- DELL
- Inox Multiplex
- Hotel Taj
- Biocon
- MICROSOFT
- ITC
- ICICI
- Asian Paints
- TCS
- CENTURY-DOMAIN
- Infosys software
- HSBC
- Jet Airways
- Balakrishna Tyres
- MOSER BAER
- Ranbaxy
- HDFC
- Sahara
- Godfrey Philips
- SAMTEL
- PVR Multiplex
- Citi Bank
- Mind Space
- Kala Academy

### OIL AND GAS

- Oil and Natural Gas Commission
- Gas Authority of India
- Oil India Limited
- SHELL
- PETRONET

### CEMENT

- ACC
- RAS Cement
- Gujrat Ambuja
- ARM
- Jai Prakash Industries
- TCIL - TORO
- Binani Cement
- TATA Cement
- Lafarge
- Birla Corporation
- Lafarge
- Larsen and Toubro
- Jabel Ali Cement
- Nigeria Cement
- Benue Cement

### FERROUS AND NON FERROUS METALS

- HINDALCO
- Hindustan Zinc
- Steel Authority of India Ltd.
- NALCO
- Essar
- BALCO
- Jindal
- Monnet Ispat
- TATA
- EBG India
- Sponge Iron Plants

### REFINERIES AND PETROCHEMICALS

- Indian Oil Corporation Ltd
- Bongaigaon Refineries Ltd
- Bharat Petroleum Corporation Ltd.
- Haldia Petrochemicals Ltd
- Indian Petrochemicals Ltd.
- CPCL, Chennai
- Kochi Refineries Ltd.
- MRPL, Mangalore
- National Aluminium Co. Ltd.
- Carin Energy
- Hindustan Petroleum Co. Ltd.
- Reliance
- Numaligarh Refineries Ltd.

### POWER AND TRANSMISSION /DOMESTIC

- TATA Power
- BSES Limited
- Gujarat State Energy Corporation
- Essar Power
- Nuclear Power Corporation
- National Thermal Power Co.
- Indian Railway
- State Electricity Boards
- Jindal Power
- DMRC
- CPWD/PWD
- CEB Mauritius
- Ahmedabad Electricity Co. Ltd.
- Crompton and Greaves
- Power Grid Corporation
- Surat Electricity Co.Ltd.
- JSPL
- ENRON
- Karnataka Power Co. Ltd.
- JVSL
- NDPL
- GEB
- BESCO
- BESCO
- MSEB
- GOA Board





## PRODUCT RANGE

KEI has been a pioneer in design and manufacture of high-performance cables and wires. Its vast portfolio, apart from EHV cables up to 400 kV, MV (medium voltage) and HT cables also includes control and instrumentation cables, rubber cables, thermocouple cables, zero halogen cables, braided cables, single and multi core flexible cables, housewire and stainless steel wires. By actively responding to changing customer demands and expectations, the company has expanded its distribution network and strengthened existing industrial product vertical.

- EHV Cables up to 400 kV
- HT Cables upto 33kV-Dry Cured Process
- LT Power Cables-Copper/Aluminium Conductor PVC, XLPE & EPR
- LT Control Cables-Copper PVC, XLPE & EPR
- Screened/Unscreened Type PVC/PE/EPR/XLPE Instrumentation Cables
- Thermocouple Compensating & Extension Cables
- Flexible & Housewires (Single & Multicore)
- Elastomeric (Rubber) Cables
- Railway Signaling Cables
- Fire Survival, Zero Halogen Cables
- Telephone Cables
- Automation Cables
- Welding Cables
- Submersible Cables/Winding Cables
- Ship Wiring Cable
- Mining Cable
- Cables for Offshore Installation
- Cables for Defence
- AB Cables
- Solar Cables

& MORE AS PER CUSTOMER SPECIFICATIONS  
IN BS, VDE, IEC, IS AND SABS STANDARDS  
(UPTO AND INCLUDING 400KV)



## MV XLPE INSULATED ARMOURED CABLES

**Application** Power cables for medium voltage (upto 33KV) are used in – outdoor cable ducts, cable trays, conduits or underground locations under mechanical stresses in power and switching stations, local distribution systems and industrial plants

**Standards.** BS 6622 & IEC 60502-2

Operating temperature	90°C
Short circuit temperature	250°C
Cable range manufactured	19/33 KV Screened Cables (33 KV Earth) 12.7/22 KV Screened Cables (22 KV Earth) 11/11 KV i.e. 11 KV (UE) Screened Cables 6.6/6.6 KV Screened Cables [6.6 KV (UE) & 11 KV (E)] 3.8/6.6 KV Screened Cables 3.3 KV (E) and (UE) Unscreened / Screened Cables
Sizes	50 Sq.mm to 1000 Sq.mm in Single Core Cables 25 Sq.mm to 400 Sq.mm in Multi Cores Cables

Rated Voltage	Test Voltage (for 5 min.)
U <sub>0</sub> KV	RMS
3.8	11
6.35	15
8.7	22
12.7	30
19	45

### CONSTRUCTION

**Conductor** Aluminium / Annealed Plain Copper Stranded compacted circular conductor conform to BS 6360 and IEC 60228, class 2

**Conductor Screening** Semi-Conducting layer over conductor

**Insulation** Cross linked Polyethylene to (XLPE)

**Insulation Screening** Semi-Conducting layer over insulation, in combination with Copper tape.

**Core colour** Single Core – Natural  
Multi Core – Numbered or colour polyester tapes applied over Copper tapes

**Bedding** Extruded PVC

**Armour** Single Core - Non-magnetic (Aluminium) wire / Flat wire Multi core - Galvanised steel wire / Flat wire / Tape

**Outer Sheath** Extruded PVC / Special PVC compound such as Flame Retardant (FR), Flame Retardant Low Smoke (FRLS), Low Smoke Zero Halogen (LSOH) can be used for outer sheath to suit a variety of environment and fire risk conditions. Flamability test confirms to IEC 332. For installation where fire and associated problems such as emission of smoke and toxic fumes offer a serious potential threat, special LSF (Low smoke & fumes) compound can be provided. LSF compound is Halogen free (Flourine, Chlorine, Bromine) when tested as per BS 6425 (Pt 1) & IEC 60754 (Pt 1). The acid gas evolved during combustion is less than 0.5% by weight of material.

## Cables Constructions

### IEC 60502-2 3/6.6 KV Single Core Alu. Wire Armoured

Nominal cross sectional area mm <sup>2</sup>	Nominal thickness of insulation mm	Approx. thickness of bedding mm	Nominal Alu. armour wire diameter mm	Nominal Thickness of PVC outer sheath mm	Approx. overall diameter mm	Approx. Cu. cable weight Kg/Km	Approx. Alu. cable weight Kg/Km
50	2.5	0.9	1.6	1.8	25	1020	717
70	2.5	0.9	1.6	1.8	27	1247	827
95	2.5	1.0	1.6	1.8	29	1530	974
120	2.5	1.0	1.6	1.9	31	1832	1119
150	2.5	1.0	1.6	1.9	32	2112	1214
185	2.5	1.1	1.6	2.0	34	2504	1408
240	2.6	1.1	2.0	2.1	38	3171	1751
300	2.8	1.2	2.0	2.2	41	3828	2054
400	3.0	1.2	2.0	2.3	44	4846	2443
500	3.2	1.3	2.5	2.5	49	6031	3064
630	3.2	1.4	2.5	2.6	53	7351	3653
800	3.2	1.5	2.5	2.8	58	9082	4397
1000	3.2	1.6	2.5	2.9	64	11095	5261

### IEC 60502-2 6/10 KV Single Core Alu. Wire Armoured

50	3.4	1.0	1.6	1.8	27	1121	819
70	3.4	1.0	1.6	1.8	29	1348	928
95	3.4	1.0	1.6	1.9	31	1639	1084
120	3.4	1.0	1.6	1.9	33	1934	1221
150	3.4	1.1	1.6	2.0	35	2312	1413
185	3.4	1.1	2.0	2.0	37	2692	1596
240	3.4	1.1	2.0	2.1	39	3277	1858
300	3.4	1.2	2.0	2.2	42	3909	2135
400	3.4	1.2	2.0	2.3	45	4907	2504
500	3.4	1.3	2.5	2.5	49	6079	3112
630	3.4	1.4	2.5	2.6	53	7403	3705
800	3.4	1.5	2.5	2.8	58	9139	4454
1000	3.4	1.6	2.5	3.0	64	11188	5354

### IEC 60502-2 8.7/15 KV Single Core Alu. Wire Armoured

50	4.5	1.0	1.6	1.8	30	1257	955
70	4.5	1.0	1.6	1.9	31	1495	1075
95	4.5	1.1	1.6	1.9	33	1796	1241
120	4.5	1.1	2.0	2.0	36	2107	1394
150	4.5	1.1	2.0	2.1	36	2412	1513
185	4.5	1.1	2.0	2.1	39	2809	1713
240	4.5	1.2	2.0	2.2	42	3473	2054
300	4.5	1.2	2.0	2.3	44	4115	2341
400	4.5	1.3	2.5	2.4	49	5299	2896
500	4.5	1.4	2.5	2.6	52	6366	3399
630	4.5	1.4	2.5	2.7	56	7688	3990
800	4.5	1.5	2.5	2.8	61	9421	4737
1000	4.5	1.6	2.5	3.0	67	11495	5661



## Cables Constructions

### IEC 60502-2 12/20 KV Single Core Alu. Wire Armoured

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Approx. thickness of bedding <b>mm</b>	Nominal Alu. armour wire diameter <b>mm</b>	Nominal Thickness of PVC outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. Cu cable weight <b>Kg/Km</b>	Approx. Alu. cable weight <b>Kg/Km</b>
50	5.5	1.0	1.6	1.9	32	1382	1080
70	5.5	1.1	1.6	2.0	35	1731	1312
95	5.5	1.1	2.0	2.0	36	2023	1468
120	5.5	1.1	2.0	2.1	39	2357	1643
150	5.5	1.2	2.0	2.1	40	2662	1764
185	5.5	1.2	2.0	2.2	42	3076	1980
240	5.5	1.2	2.0	2.3	44	3685	2266
300	5.5	1.3	2.0	2.3	48	4442	2668
400	5.5	1.3	2.5	2.5	51	5497	3095
500	5.5	1.4	2.5	2.6	54	6566	3598
630	5.5	1.5	2.5	2.8	59	7948	4250
800	5.5	1.6	2.5	2.9	63	9703	5018
1000	5.5	1.7	2.5	3.1	69	11785	5951

### IEC 60502-2 18/30 KV Single Core Alu. Wire Armoured

50	8.0	1.1	2.0	2.1	39	1839	1536
70	8.0	1.2	2.0	2.2	41	2131	1711
95	8.0	1.2	2.0	2.2	43	2440	1885
120	8.0	1.2	2.0	2.3	45	2794	2080
150	8.0	1.3	2.0	2.3	47	3239	2340
185	8.0	1.3	2.5	2.4	49	3672	2576
240	8.0	1.3	2.5	2.5	51	4322	2902
300	8.0	1.4	2.5	2.6	54	5000	3226
400	8.0	1.4	2.5	2.7	57	6062	3659
500	8.0	1.5	2.5	2.8	60	7164	4197
630	8.0	1.6	2.5	2.9	65	8558	4859
800	8.0	1.7	2.5	3.1	69	10384	5699
1000	8.0	1.8	2.5	3.3	75	12522	6688



## Cables Constructions

### IEC 60502-2 3.6/6 KV Three Core Flat Strip Armoured

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Approx. thickness of bedding <b>mm</b>	Nominal Dimension G.I.Flat Strip. <b>mm</b>	Nominal Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. Copper cable weight <b>Kg/Km</b>	Approx. Alu. cable weight <b>Kg/Km</b>
35	2.5	1.2	4 X 0.8	2.2	42	2790	2168
50	2.5	1.2	4 X 0.8	2.3	44	3365	2455
70	2.5	1.4	4 X 0.8	2.4	48	4108	2850
95	2.5	1.4	4 X 0.8	2.5	52	5049	3359
120	2.5	1.4	4 X 0.8	2.6	57	6037	3903
150	2.5	1.6	4 X 0.8	2.7	59	6984	4294
185	2.5	1.6	4 X 0.8	2.9	63	8230	4941
240	2.6	1.6	4 X 0.8	3.0	69	10237	5987
300	2.8	1.8	4 X 0.8	3.2	75	12361	7050
400	3.0	1.8	4 X 0.8	3.5	83	15632	8438

### IEC 60502-2 6/10 KV Three Core Flat Strip Armoured

35	3.4	1.4	4 X 0.8	2.3	46	3186	2564
50	3.4	1.4	4 X 0.8	2.4	48	3709	2799
70	3.4	1.4	4 X 0.8	2.6	52	4526	3269
95	3.4	1.4	4 X 0.8	2.7	56	5495	3804
120	3.4	1.6	4 X 0.8	2.8	61	6566	4431
150	3.4	1.6	4 X 0.8	2.9	63	7451	4762
185	3.4	1.6	4 X 0.8	3.0	67	8720	5431
240	3.4	1.6	4 X 0.8	3.2	73	10632	6383
300	3.4	1.8	4 X 0.8	3.3	78	12646	7336
400	3.4	1.8	4 X 0.8	3.5	85	15951	8757

### IEC 60502-2 8.7/15 KV Three Core Flat Strip Armoured

50	4.5	1.4	4 X 0.8	2.6	54	4184	3275
70	4.5	1.6	4 X 0.8	2.7	58	5080	3822
95	4.5	1.6	4 X 0.8	2.8	62	6058	4367
120	4.5	1.6	4 X 0.8	2.9	66	7134	5001
150	4.5	1.6	4 X 0.8	3.0	68	8027	5338
185	4.5	1.6	4 X 0.8	3.2	73	9362	6073
240	4.5	1.8	4 X 0.8	3.3	78	11348	7099
300	4.5	1.8	4 X 0.8	3.5	83	13369	8059
400	4.5	1.8	4 X 0.8	3.7	90	16707	9513

### IEC 60502-2 12/20 KV Three Core Flat Strip Armoured

50	5.5	1.6	4 X 0.8	2.8	59	4717	3807
70	5.5	1.6	4 X 0.8	2.9	62	5593	4336
95	5.5	1.6	4 X 0.8	3.0	66	6601	4910
120	5.5	1.6	4 X 0.8	3.1	71	7711	5577
150	5.5	1.6	4 X 0.8	3.2	73	8614	5925
185	5.5	1.8	4 X 0.8	3.3	77	10016	6727
240	5.5	1.8	4 X 0.8	3.5	83	12011	7762
300	5.5	1.8	4 X 0.8	3.6	88	14028	8718
400	5.5	1.8	4 X 0.8	3.9	95	17457	10263

### IEC 60502-2 18/30 KV Three Core Flat Strip Armoured

50	8.0	1.6	4 X 0.8	3.1	71	6181	5272
70	8.0	1.8	4 X 0.8	3.2	75	7176	5919
95	8.0	1.8	4 X 0.8	3.4	79	8322	6632
120	8.0	1.8	4 X 0.8	3.5	84	9501	7367
150	8.0	1.8	4 X 0.8	3.6	86	10433	7743
185	8.0	1.8	4 X 0.8	3.7	90	11852	8563
240	8.0	1.8	4 X 0.8	3.9	96	13952	9704
300	8.0	2.0	4 X 0.8	4.0	101	16145	10835
400	8.0	2.0	4 X 0.8	4.2	107	19534	12340

## Cables Constructions

### IEC 60502-2 3.6/6 KV Three Core RWA Cable

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Approx. thickness of bedding <b>mm</b>	Nominal G.I. Armour wire diameter <b>mm</b>	Nominal Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. Copper cable weight <b>Kg/Km</b>	Approx. Alu. cable weight <b>Kg/Km</b>
35	2.5	1.2	2.0	2.3	45	3457	2835
50	2.5	1.2	2.5	2.4	48	4425	3515
70	2.5	1.4	2.5	2.5	52	5270	4013
95	2.5	1.4	2.5	2.7	56	6314	4624
120	2.5	1.4	2.5	2.8	60	7419	5285
150	2.5	1.6	2.5	2.9	63	8395	5706
185	2.5	1.6	2.5	3.0	67	9753	6464
240	2.6	1.6	2.5	3.2	73	11933	7685
300	2.8	1.8	3.15	3.4	80	14957	9647
400	3.0	1.8	3.15	3.7	88	18529	11336

### IEC 60502-2 6/10 KV Three Core RWA Cable

35	3.4	1.4	2.5	2.4	49	4271	3649
50	3.4	1.4	2.5	2.5	51	4758	3849
70	3.4	1.4	2.5	2.7	55	5677	4419
95	3.4	1.4	2.5	2.8	59	6757	5067
120	3.4	1.6	2.5	2.9	64	7936	5801
150	3.4	1.6	2.5	3.0	66	8871	6181
185	3.4	1.6	2.5	3.1	70	10214	6925
240	3.4	1.6	3.15	3.3	77	13045	8797
300	3.4	1.8	3.15	3.5	82	15257	9946
400	3.4	1.8	3.15	3.7	89	18796	11603

### IEC 60502-8.7/15 KV Three Core RWA Cable

50	4.5	1.4	2.5	2.7	57	5475	4565
70	4.5	1.6	2.5	2.8	61	6448	5190
95	4.5	1.6	2.5	3.0	65	7557	5866
120	4.5	1.6	2.5	3.1	70	8728	6594
150	4.5	1.6	2.5	3.2	72	9673	6983
185	4.5	1.6	3.15	3.3	77	11852	8563
240	4.5	1.8	3.15	3.5	84	14074	9825
300	4.5	1.8	3.15	3.6	88	16225	10914
400	4.5	1.8	3.15	3.9	95	19864	12670

### IEC 60502- 12/20 KV Three Core RWA Cable

50	5.5	1.6	2.5	2.9	62	6125	5215
70	5.5	1.6	2.5	3.0	66	7079	5821
95	5.5	1.6	2.5	3.1	70	8188	6497
120	5.5	1.6	2.5	3.2	75	9389	7254
150	5.5	1.6	3.15	3.4	78	11139	8449
185	5.5	1.8	3.15	3.5	83	12706	9417
240	5.5	1.8	3.15	3.6	88	14866	10618
300	5.5	1.8	3.15	3.8	93	17090	11780
400	5.5	1.8	3.15	4.0	100	20740	13545

### IEC 60502- 18/30 KV Three Core RWA Cable

50	8.0	1.6	2.5	3.3	75	7892	6982
70	8.0	1.8	3.15	3.4	80	9795	8536
95	8.0	1.8	3.15	3.5	84	11071	9381
120	8.0	1.8	3.15	3.6	89	12416	10282
150	8.0	1.8	3.15	3.7	90	13384	10695
185	8.0	1.8	3.15	3.9	95	15011	11722
240	8.0	1.8	3.15	4.0	101	17212	12963
300	8.0	2.0	3.15	4.2	106	19675	14364
400	8.0	2.0	3.15	4.4	113	23302	16109

## Cables Constructions

### BS6622 3.8/6.6 KV Single Core Cu/ XLPE/Alu. Wire / PVC

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Minimum thickness of bedding <b>mm</b>	Nominal armour wire diameter <b>mm</b>	Min. Thickness of PVC outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. cable weight <b>Kg/Km</b>	Max.DC Resistance at 20°C <b>Ohm/Km</b>
50	2.5	0.76	1.6	1.24	24.2	1090	0.387
70	2.5	0.76	1.6	1.24	25.8	1340	0.268
95	2.5	0.76	1.6	1.32	27.7	1660	0.193
120	2.5	0.76	1.6	1.32	29.8	1970	0.153
150	2.5	0.76	1.6	1.40	30.7	2260	0.124
185	2.5	0.76	2.0	1.40	33.4	2760	0.0991
240	2.6	0.76	2.0	1.48	36.4	3430	0.0754
300	2.8	0.76	2.0	1.56	39.0	4130	0.0601
400	3.0	0.76	2.0	1.64	42.6	5080	0.0470
500	3.2	0.84	2.5	1.80	47.7	6490	0.0366
630	3.2	0.92	2.5	1.88	51.5	8030	0.0283
800	3.2	0.92	2.5	1.96	56.1	9930	0.0221
1000	3.2	1.00	2.5	2.12	61.9	12200	0.0176

### 6.35/11KV Single Core Cu/ XLPE/Alu. Wire / PVC

50	3.4	0.76	1.6	1.24	26.2	1200	0.387
70	3.4	0.76	1.6	1.32	28.0	1470	0.268
95	3.4	0.76	1.6	1.32	29.7	1780	0.193
120	3.4	0.76	1.6	1.40	32.0	2110	0.153
150	3.4	0.76	2.0	1.48	33.7	2500	0.124
185	3.4	0.76	2.0	1.48	35.6	2920	0.0991
240	3.4	0.76	2.0	1.56	38.3	3580	0.0754
300	3.4	0.76	2.0	1.56	40.3	4230	0.0601
400	3.4	0.76	2.0	1.72	43.7	5180	0.0470
500	3.4	0.84	2.5	1.80	48.1	6530	0.0366
630	3.4	0.92	2.5	1.88	51.9	8080	0.0283
800	3.4	0.92	2.5	1.96	56.5	9970	0.0221
1000	3.4	1.0	2.5	2.12	62.3	12250	0.0176

### 8.7/15 KV Single Core Cu/ XLPE/Alu. Wire / PVC

50	4.5	0.76	1.6	1.32	28.9	1360	0.387
70	4.5	0.76	1.6	1.32	30.5	1620	0.268
95	4.5	0.76	2.0	1.40	33.2	2050	0.193
120	4.5	0.76	2.0	1.48	35.5	2390	0.153
150	4.5	0.76	2.0	1.48	36.2	2680	0.124
185	4.5	0.76	2.0	1.56	38.3	3130	0.0991
240	4.5	0.76	2.0	1.64	41.0	3800	0.0754
300	4.5	0.76	2.0	1.64	43.0	4470	0.0601
400	4.5	0.84	2.5	1.80	47.6	5610	0.0470
500	4.5	0.84	2.5	1.88	50.6	6780	0.0366
630	4.5	0.92	2.5	1.96	54.6	8370	0.0283
800	4.5	1.00	2.5	2.04	59.4	10310	0.0221
1000	4.5	1.08	2.5	2.20	65.2	12630	0.0176

### 12.7/22 KV Single Core Cu/ XLPE/Alu. Wire / PVC

50	5.5	0.76	1.60	1.40	32.1	1570	0.387
70	5.5	0.76	2.00	1.40	34.5	1940	0.268
95	5.5	0.76	2.00	1.48	36.4	2290	0.193
120	5.5	0.76	2.00	1.48	38.5	2630	0.153
150	5.5	0.76	2.00	1.56	39.4	2950	0.124
185	5.5	0.76	2.00	1.56	41.3	3390	0.0991
240	5.5	0.76	2.00	1.64	44.0	4070	0.0754
300	5.5	0.84	2.50	1.72	47.4	4940	0.0601
400	5.5	0.84	2.50	1.80	50.6	5920	0.0470
500	5.5	0.92	2.50	1.88	53.8	7130	0.0366
630	5.5	0.92	2.50	2.04	57.8	8740	0.0283
800	5.5	1.00	2.50	2.12	62.6	10720	0.0221
1000	5.5	1.08	2.50	2.20	68.2	13040	0.0176



## MV XLPE Insulated Armoured Cables

### 19/33 KV Single Core Cu/ XLPE/Alu. Wire / PVC

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Minimum Thickness of bedding <b>mm</b>	Nominal armour wire diameter <b>mm</b>	Min. Thickness of PVC outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. cable weight <b>Kg/Km</b>	Max.DC Resistance at 20°C <b>Ohm/Km</b>
50	8.0	0.76	2.0	1.56	38.7	2100	0.387
70	8.0	0.76	2.0	1.56	40.3	2390	0.268
95	8.0	0.76	2.0	1.64	42.2	2770	0.193
120	8.0	0.76	2.0	1.64	44.3	3130	0.153
150	8.0	0.84	2.5	1.72	46.4	3630	0.124
185	8.0	0.84	2.5	1.80	48.5	4110	0.0991
240	8.0	0.84	2.5	1.80	51.0	4810	0.0754
300	8.0	0.92	2.5	1.88	53.2	5540	0.0601
400	8.0	0.92	2.5	1.96	56.4	6560	0.0470
500	8.0	1.00	2.5	2.04	59.8	7830	0.0366
630	8.0	1.00	2.5	2.12	63.6	9460	0.0283
800	8.0	1.08	2.5	2.28	68.6	11520	0.0221
1000	8.0	1.16	2.5	2.36	74.2	13900	0.0176

### 3.8/6.6 KV Three Core Cu/ XLPE/ SWA / PVC

25	2.5	0.76	2.0	1.56	40.2	3330	0.727
35	2.5	0.76	2.0	1.64	42.5	3850	0.524
50	2.5	0.84	2.5	1.80	46.5	4900	0.387
70	2.5	0.84	2.5	1.88	50.2	5880	0.268
95	2.5	0.92	2.5	1.96	54.2	7090	0.193
120	2.5	1.00	2.5	2.04	59.2	8360	0.153
150	2.5	1.00	2.5	2.12	60.9	9300	0.124
185	2.5	1.08	2.5	2.20	65.4	10900	0.0991
240	2.6	1.16	2.5	2.36	72.0	13430	0.0754
300	2.8	1.24	3.15	2.60	79.3	16950	0.0601
400	3.0	1.40	3.15	2.76	87.5	20480	0.0470

### 6.35/11 KV Three Core Cu/ XLPE/ SWA / PVC

25	3.4	0.84	2.5	1.72	46.1	4330	0.727
35	3.4	0.84	2.5	1.80	48.4	4880	0.524
50	3.4	0.92	2.5	1.88	51.2	5540	0.387
70	3.4	0.92	2.5	1.96	54.9	6550	0.268
95	3.4	1.00	2.5	2.04	58.9	7800	0.193
120	3.4	1.08	2.5	2.20	64.1	9150	0.153
150	3.4	1.08	2.5	2.28	65.8	10100	0.124
185	3.4	1.16	2.5	2.36	70.3	11700	0.0991
240	3.4	1.24	3.15	2.52	77.6	15020	0.0754
300	3.4	1.32	3.15	2.68	82.5	17010	0.0601
400	3.4	1.40	3.15	2.84	89.6	21040	0.0470

### 8.7/15 KV Three Core Cu/ XLPE/ SWA / PVC

25	4.5	0.92	2.5	1.88	52.1	5200	0.727
35	4.5	0.92	2.5	1.96	54.4	5690	0.524
50	4.5	1.00	2.5	2.04	57.2	6470	0.387
70	4.5	1.00	2.5	2.12	60.9	7420	0.268
95	4.5	1.08	2.5	2.20	64.9	8720	0.193
120	4.5	1.16	2.5	2.28	69.9	10080	0.153
150	4.5	1.16	2.5	2.36	71.6	11170	0.124
185	4.5	1.24	3.15	2.52	77.6	13660	0.0991
240	4.5	1.32	3.15	2.68	83.6	16360	0.0754
300	4.5	1.40	3.15	2.76	88.3	18870	0.0601
400	4.5	1.48	3.15	3.00	95.6	22290	0.0470

## Cables Constructions

### 12.7/22 KV Three Core Cu/ XLPE/SWA/ PVC

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Minimum Thickness of bedding <b>mm</b>	Nominal armour wire diameter <b>mm</b>	Min. Thickness of PVC outer sheath <b>mm</b>	Approx. over all diameter <b>mm</b>	Approx. cable weight <b>Kg/Km</b>	Max.DC Resistance at 20°C <b>Ohm/Km</b>
35	5.5	1.00	2.50	2.04	60.9	6440	0.524
50	5.5	1.00	2.50	2.12	63.5	7150	0.387
70	5.5	1.08	2.50	2.20	67.3	8280	0.268
95	5.5	1.16	2.50	2.36	71.6	9630	0.193
120	5.5	1.16	3.15	2.44	77.6	11930	0.153
150	5.5	1.24	3.15	2.52	79.5	12930	0.124
185	5.5	1.32	3.15	2.68	84.2	14750	0.0991
240	5.5	1.40	3.15	2.76	90.0	17210	0.0754
300	5.5	1.40	3.15	2.92	94.8	19720	0.0601
400	5.5	1.56	3.15	3.08	102.0	23140	0.0470

### 19/33 KV Three Core Cu/ XLPE/ SWA / PVC

50	8.0	1.24	3.15	2.52	78.5	10730	0.387
70	8.0	1.24	3.15	2.60	82.1	11870	0.268
95	8.0	1.32	3.15	2.68	86.2	13380	0.193
120	8.0	1.40	3.15	2.76	91.1	14940	0.153
150	8.0	1.40	3.15	2.84	92.8	16170	0.124
185	8.0	1.48	3.15	2.92	97.3	18050	0.0991
240	8.0	1.56	3.15	3.08	103.3	20810	0.0754
300	8.0	1.64	3.15	3.24	108.3	23480	0.0601
400	8.0	1.72	3.15	3.40	115.3	27150	0.0470



Conductor Technical Data for single Core and Multicore cables conforming to IEC 60228 (Stranded-Class-2) Aluminium Conductors and annealed copper conductors, stranded circular, compacted circular or shaped

Table -1

Nominal size of Conductor mm <sup>2</sup>	Short Circuit Rating (ISC) for XLPE cables		Max. D.C. Resistance at 20°C		Max. A.C. Resistance at 90°C	
	Copper KA/sec	Aluminium KA/sec	Plain Copper Ω/Km	Aluminium Ω/Km	Plain Copper Ω/Km	Aluminium Ω/Km
1.5	0.21	-	12.200	-	15.430	-
2.5	0.36	-	7.410	-	9.450	-
4.0	0.57	0.38	4.610	7.410	5.880	9.480
6.0	0.85	0.56	3.080	4.610	3.930	5.900
10	1.42	0.94	1.830	3.080	2.330	3.490
16	2.27	1.50	1.150	1.910	1.470	2.420
25	3.60	2.40	0.727	1.200	0.930	1.540
35	5.00	3.30	0.524	0.868	0.671	1.110
50	7.10	4.70	0.387	0.641	0.495	0.820
70	10.0	6.60	0.268	0.443	0.343	0.567
95	13.6	9.00	0.193	0.320	0.247	0.410
120	17.1	11.3	0.153	0.253	0.196	0.324
150	21.4	14.2	0.124	0.206	0.159	0.264
185	26.4	17.5	0.0991	0.164	0.127	0.210
240	34.3	22.6	0.0754	0.125	0.0965	0.160
300	42.9	28.3	0.0601	0.100	0.0769	0.130
400	57.1	37.7	0.0470	0.0778	0.0602	0.100
500	71.4	47.2	0.0366	0.0605	0.0468	0.0774
630	90.0	59.4	0.0283	0.0469	0.0362	0.0600
800	114.3	75.5	0.0221	0.0367	0.0283	0.0470
1000	142.9	94.3	0.0176	0.0291	0.0225	0.0372

**Short Circuit Current Ratings for XLPE Cables**

Short Circuit Rating for 1 second duration for Copper and Aluminium XLPE Cables (Isc Current in KAmps)

**Ratings for any other duration :**

- 1) Max. Initial Conductor Temperature during operation : 90°C
- 2) Max. Final Conductor Temperature during short circuit : 250°C

Formula relating short Circuit Rating with t second duration

$$1t = 1sc / \sqrt{t}$$

Where 1t = Short Circuit Rating for t seconds.

t = Duration in seconds.

1sc = Short Circuit rating for 1 second.

Emergency overload : Cable may operate under overload conditions. Under such condition conductor temperature not to exceed 130°C for maximum 100 hours per year and not more that 500 hours during lifetime of cable. This is approximately 20% higher than specified rated current during the emergency period.




**Current ratings for single core cable with XLPE insulation**





Rated Voltage 3.6/6 KV to 18/30 KV Copper Conductor

Nominal area of conductor mm <sup>2</sup>	Buried direct in the ground 20° C		In single-way ducts 20° C		In Air 30° C		
	Trefoil	Flat spaced	Trefoil Ducts	Flat touching ducts	Trefoil	Flat touching	Flat spaced
mm <sup>2</sup>	A	A	A	A	A	A	A
16	109	113	103	104	125	128	150
25	140	144	132	133	163	167	196
35	166	172	157	159	198	203	238
50	196	203	186	188	238	243	286
70	239	246	227	229	296	303	356
95	285	293	271	274	361	369	434
120	323	332	308	311	417	426	500
150	361	366	343	347	473	481	559
185	406	410	387	391	543	550	637
240	469	470	447	453	641	647	745
300	526	524	504	510	735	739	846
400	590	572	564	571	845	837	938
500	650	710	-	-	950	-	1090
630	730	790	-	-	1070	-	1260
800	820	910	-	-	1200	-	1410
1000	930	1030	-	-	1360	-	1610

- Maximum conductor temperature 90°C
- Ambient air temperature 30°C
- Ground temperature 20°C
- Depth of playing 0.8 m
- Thermal resistivity of soil 1.5 K.m/W
- Thermal resistivity of earthenware ducts 1.2 k.m/W
- Screens bonded at both ends.

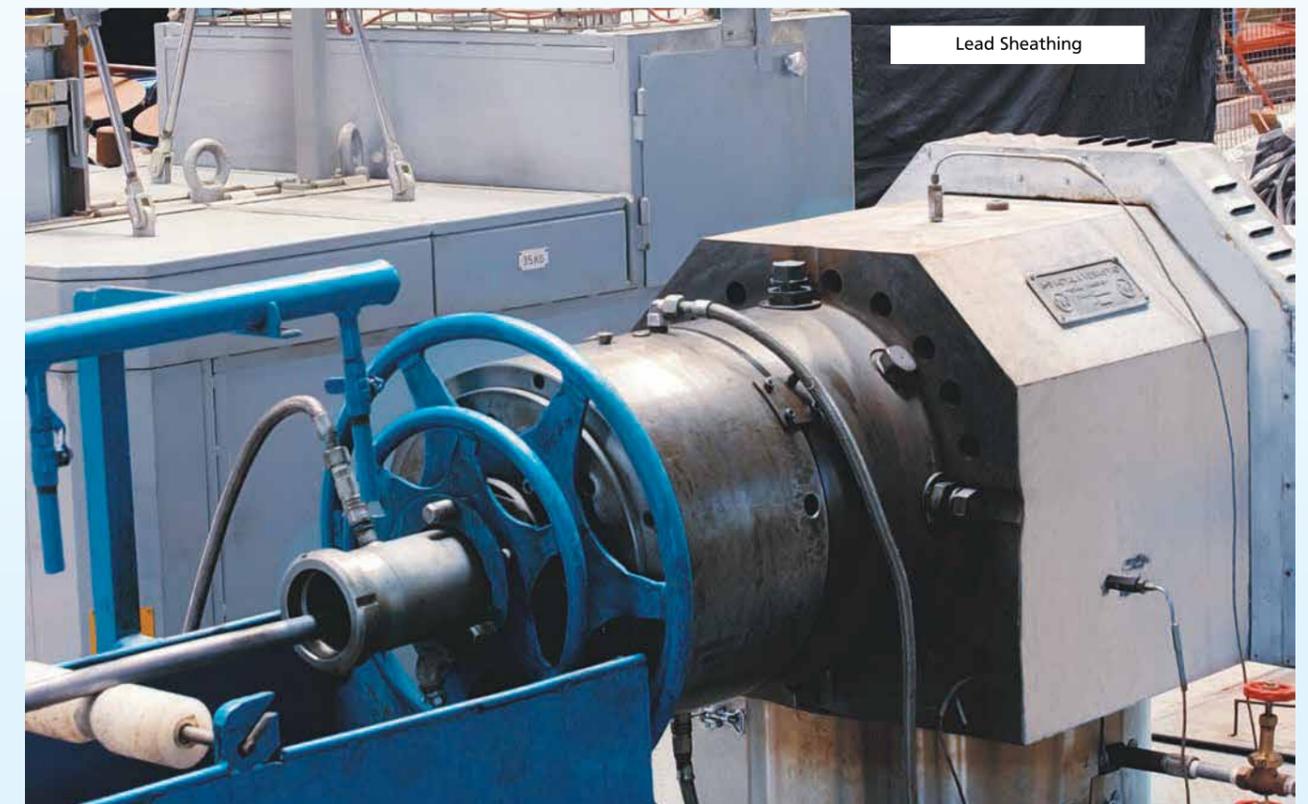

**Current ratings for single-core cables with XLPE insulation-rated voltage 3.6/6 KV to 18/30 KV  
Aluminium conductor**

Nominal area of conductor	Buried direct in the ground 20°C		In single-way ducts 20°C		In Air 30°C		
	Trefoil	Flat spaced	Trefoil Ducts	Flat touching ducts	Trefoil	Flat touching	Flat spaced
							
mm <sup>2</sup>	A	A	A	A	A	A	A
16	84	88	80	81	97	99	116
25	108	112	102	103	127	130	153
35	129	134	122	123	154	157	185
50	152	157	144	146	184	189	222
70	186	192	176	178	230	236	278
95	221	229	210	213	280	287	338
120	252	260	240	242	324	332	391
150	281	288	267	271	368	376	440
185	317	324	303	307	424	432	504
240	367	373	351	356	502	511	593
300	414	419	397	402	577	586	677
400	470	466	451	457	673	676	769
500	520	560	-	-	660	-	760
630	590	640	-	-	740	-	850
800	670	720	-	-	840	-	960
1000	750	800	-	-	950	-	1100


Maximum conductor temperature 90°C  
 Ambient air temperature 30°C  
 Ground temperature 20°C  
 Depth of playing 0.8 m  
 Thermal resistivity of soil 1.5 K.m/W  
 Thermal resistivity of earthenware ducts 1.2 k.m/W  
 Screens bonded at both ends.

**Current ratings for three core XLPE insulated cables rated voltage 3.6/6 KV. to 18/30 KV  
Aluminium conductor, Armoured and Unarmoured**

Nominal area of conductor	Unarmoured			Armoured		
	Buried Direct in ground 20°C	In a Buried duct 20°C	In Air 30°C	Buried Direct in ground 20°C	In a Buried duct 20°C	In Air 30°C
						
mm <sup>2</sup>	A	A	A	A	A	A
16	78	67	84	78	68	85
25	100	87	110	100	87	111
35	119	103	132	119	104	133
50	140	122	158	140	123	159
70	171	150	196	171	150	196
95	203	179	236	204	180	238
120	232	205	273	232	206	274
150	260	231	309	259	231	309
185	294	262	355	293	262	354
240	340	305	415	338	304	415
300	384	346	475	380	343	472
400	438	398	552	432	393	545

Maximum conductor temperature 90°C  
 Ambient air temperature 30°C  
 Ground temperature 20°C  
 Depth of playing 0.8 m  
 Thermal resistivity of soil 1.5 K.m/W  
 Thermal resistivity of earthenware ducts 1.2 k.m/W  
 Screens bonded at both ends.

**Current ratings for three-core cables with XLPE insulation-rated voltage 3.6/6 KV to 18/30 KV  
Copper conductor Armoured and Unarmoured**

Nominal area of conductor	Unarmoured			Armoured		
	Buried Direct in ground 20°C	In a Buried duct 20°C	In Air 30°C	Buried Direct in ground 20°C	In a Buried duct 20°C	In Air 30°C
						
mm <sup>2</sup>	A	A	A	A	A	A
16	101	87	109	101	88	110
25	129	112	142	129	112	143
35	153	133	170	154	134	172
50	181	158	204	181	158	205
70	221	193	253	220	194	253
95	262	231	304	263	232	307
120	298	264	351	298	264	352
150	334	297	398	332	296	397
185	377	336	455	374	335	453
240	434	390	531	431	387	529
300	489	441	606	482	435	599
400	553	501	696	541	492	683

Maximum conductor temperature 90°C  
 Ambient air temperature 30°C  
 Ground temperature 20°C  
 Depth of playing 0.8 m  
 Thermal resistivity of soil 1.5 K.m/W  
 Thermal resistivity of earthenware ducts 1.2 k.m/W  
 Screens bonded at both ends.



## XLPE INSULATED ARMoured CABLES

- Application – Indoors or Outdoors in cable ducts, cable trays, conduits or underground locations under mechanical stresses in power and switching stations.  
– Local distribution systems, Industrial and Commercial units for basic power & lighting purpose.

**Standards BS 5467, IEC 60502-1& VDE 0276**

Operating Temperature	90° C
Short Circuit Temp.	250° C
Working Voltage	600 / 1000 Volts
Test Voltage	3.5 KV r m s for 5 minutes

### CONSTRUCTION

**Conductor** Aluminium / Annealed plain copper solid\* / stranded conductor conform to BS 6360 and IEC 60228 Class 2 (Circular / Sector shaped)

**Insulation** Cross linked polyethylene (XLPE)

<b>Core Colour</b>	Single core	Red or Black
	2 Core	Red , Black
	3 Core	Red , Yellow , Blue
	4 Core	Red , Yellow, Blue, Black
	5 Core	Red , Yellow, Blue, Black & Yellow - Green
	6 Core & above	Black colour with number printing

**Assembly** Insulated conductors are laid up together, if necessary interstices may be filled with fillers.

**Fillers** Non-hygroscopic Poly propylene fillers are included between laid up cores wherever required.

A separator tape of non-hygroscopic poly propylene material is applied over laid up core wherever necessary.

**Bedding** Extruded PVC compatible with operating temperature

**Armour** For Single Core - Aluminium round wire / flat wire. For Multicore - Galvanised Steel round wire / flat wire / tape.

**Outer Sheath** Extruded PVC / Special PVC compound such as Flame Retardant (FR), Flame Retardant Low Smoke (FRLS), Low Smoke Zero Halogen (LSOH) can be used for outer sheath to suit a variety of environment and fire risk conditions. Flamability test confirms to IEC 332 & Swidish chimney. For installation where fire and associated problems such as emission of smoke and toxic fumes offer a serious potential threat, special LSF (Low smoke & fumes) compound can be provided. LSF compound is Halogen free (Flourine, Chlorine, Bromine) when tested as per BS 6425 (Pt 1) & IEC 60754 (Pt 1). The acid gas evolved during combustion is less than 0.5% by weight of material.

Minimum Bending radius 12 times the cable diameter

Admissible Pulling Force Aluminium - 30N/mm<sup>2</sup> Copper - 50N/mm<sup>2</sup>



## Cables Constructions

### IEC 60502-1 0.6/1.0 KV Single Core XLPE/PVC/RWA/PVC

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Approx. Thickness of bedding <b>mm</b>	Nominal Alu. armour wire diameter <b>mm</b>	Nominal Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. Copper Cable weight <b>Kg/Km</b>	Approx. Alu. Cable weight <b>Ohm/Km</b>
25	0.90	1.0	0.8	1.8	15.5	447	300
35	0.90	1.0	0.8	1.8	16.5	553	346
50	1.00	1.0	1.25	1.8	19.0	757	454
70	1.10	1.0	1.25	1.8	21.0	978	558
95	1.10	1.0	1.25	1.8	22.5	1,233	677
120	1.20	1.0	1.6	1.8	25.5	1,559	846
150	1.40	1.0	1.6	1.8	26.5	1,854	955
185	1.60	1.0	1.6	1.8	29.0	2,226	1,130
240	1.70	1.0	1.6	1.9	32.0	2,791	1,372
300	1.80	1.0	1.6	1.9	34.0	3,378	1,604
400	2.00	1.2	2.0	2.1	39.0	4,502	2,099
500	2.20	1.2	2.0	2.2	43.0	5,506	2,539
630	2.40	1.2	2.0	2.3	47.0	6,796	3,098
800	2.60	1.4	2.5	2.5	53.5	8,757	4,072
1000	2.80	1.4	2.5	2.7	59.5	10,782	4,948

### IEC 60502-1 0.6/1.0 KV Two Cores XLPE/PVC/RWA/PVC

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Approx. Thickness of bedding <b>mm</b>	Nominal G.I. armour wire diameter <b>mm</b>	Nominal Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. Copper Cable weight <b>Kg/Km</b>	Approx. Alu. Cable weight <b>Kg/Km</b>	XLPE/PVC/FSA/PVC					
								Nominal dimension G.I. Flat Strip <b>mm</b>	Nominal Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. copper cable weight <b>Kg/Km</b>	Approx. Alu. Cable weight <b>Kg/Km</b>	
1.5	0.7	1.0	0.8	1.8	14.0	325	298						
2.5	0.7	1.0	0.8	1.8	15.0	372	328						
4.0	0.7	1.0	0.8	1.8	16.0	444	397						
6.0	0.7	1.0	0.8	1.8	17.0	520	446						
10	0.7	1.0	1.25	1.8	20.0	802	680						
16	0.7	1.0	1.25	1.8	22.0	995	807						
25	0.90	1.0	1.60	1.8	21.0	1124	830	4 X 0.8	1.8	19.5	936	642	
35	0.90	1.0	1.60	1.8	22.5	1367	952	4 X 0.8	1.8	21.0	1158	742	
50	1.00	1.0	1.60	1.8	24.5	1714	1107	4 X 0.8	1.8	23.0	1507	901	
70	1.10	1.0	1.60	2.0	27.5	2212	1374	4 X 0.8	1.9	26.0	1964	1126	
95	1.10	1.2	2.00	2.1	31.5	2993	1865	4 X 0.8	2.0	29.0	2500	1372	
120	1.20	1.2	2.00	2.2	34.5	3579	2155	4 X 0.8	2.1	31.5	3059	1636	
150	1.40	1.2	2.00	2.3	37.0	4282	2490	4 X 0.8	2.2	34.5	3713	1920	
185	1.60	1.4	2.50	2.5	42.0	5480	3287	4 X 0.8	2.4	38.5	4546	2353	
240	1.70	1.4	2.50	2.7	46.0	6712	3880	4 X 0.8	2.6	42.0	5670	2838	
300	1.80	1.6	2.50	2.8	50.0	8108	4568	4 X 0.8	2.7	46.5	6947	3407	
400	2.00	1.6	2.50	3.1	55.0	10204	5408	4 X 0.8	3.0	51.5	8958	4163	



Note : Unarmoured cables construction details available upon request.

\*Aluminium - upto 10 mm<sup>2</sup> Copper - upto 6 mm<sup>2</sup>

\*\*Modification which serve to improve our products will be implemented without notice.

# Cables Constructions

## IEC 60502-1 0.6/1.0 KV Three Cores XLPE/PVC/RWA/PVC XLPE/PVC/FSA/PVC

Nominal cross sectional area mm <sup>2</sup>	Nominal thickness of insulation mm	Approx. Thickness of bedding mm	Nominal G.I. armour wire diameter mm	Nominal Thickness of outer sheath mm	Approx. overall diameter mm	Approx. Copper Cable weight Kg/Km	Approx. Alu. Cable weight Kg/Km	Nominal dimension G.I. Flat Strip. mm	Nominal Thickness of outer sheath mm	Approx. overall diameter mm	Approx. Copper Cable weight Kg/Km	Approx. Alu. Cable weight Kg/Km
1.5	0.7	1.0	0.8	1.8	14.5	353	314					
2.5	0.7	1.0	0.8	1.8	15.5	411	345					
4.0	0.7	1.0	0.8	1.8	16.5	497	427					
6.0	0.7	1.0	0.8	1.8	18.0	597	486					
10	0.7	1.0	1.25	1.8	21.0	922	738					
16	0.7	1.0	1.25	1.8	23.0	1172	890					
25	0.90	1.0	1.60	1.8	23.5	1474	1032	4 X 0.8	1.8	22.0	1258	817
35	0.90	1.0	1.60	1.8	25.0	1787	1165	4 X 0.8	1.8	23.5	1565	943
50	1.00	1.0	1.60	1.9	28.5	2348	1439	4 X 0.8	1.8	27.0	2069	1160
70	1.10	1.2	2.00	2.0	33.0	3252	1995	4 X 0.8	2.0	30.5	2774	1516
95	1.10	1.2	2.00	2.2	36.5	4092	2401	4 X 0.8	2.1	33.5	3548	1857
120	1.20	1.2	2.00	2.3	39.5	4934	2800	4 X 0.8	2.2	37.0	4340	2206
150	1.40	1.4	2.50	2.5	44.5	6367	3678	4 X 0.8	2.3	41.0	5348	2659
185	1.60	1.4	2.50	2.6	48.5	7608	4319	4 X 0.8	2.5	45.0	6465	3176
240	1.70	1.6	2.50	2.8	53.0	9378	5130	4 X 0.8	2.7	49.5	8152	3903
300	1.80	1.6	2.50	3.0	59.5	11434	6123	4 X 0.8	2.8	55.5	10009	4698
400	2.00	1.6	2.50	3.2	64.5	14456	7262	4 X 0.8	3.1	61.0	12960	5766

## IEC 60502-1 0.6/1.0 KV Four Cores with reduced Neutral XLPE/PVC/RWA/PVC XLPE/PVC/FSA/PVC

Nominal cross sectional area mm <sup>2</sup>	Nominal thickness of insulation mm	Approx. Thickness of bedding mm	Nominal G.I. armour wire diameter mm	Nominal Thickness of outer sheath mm	Approx. overall diameter mm	Approx. Copper Cable weight Kg/Km	Approx. Alu. Cable weight Kg/Km	Nominal dimension G.I. Flat Strip. mm	Nominal Thickness of outer sheath mm	Approx. overall diameter mm	Approx. Copper Cable weight Kg/Km	Approx. Alu. Cable weight Kg/Km
25	0.90	1.0	1.60	1.8	24.5	1652	1117	4 X 0.8	1.8	23.0	1446	910
35	0.90	1.0	1.60	1.8	26.0	1987	1270	4 X 0.8	1.8	24.5	1758	1042
50	1.00	1.0	1.60	1.9	29.5	2608	1552	4 X 0.8	1.9	27.5	2351	1295
70	1.10	1.2	2.00	2.1	34.5	3663	2197	4 X 0.8	2.1	32.0	3159	1694
95	1.10	1.2	2.00	2.2	38.0	4653	2660	4 X 0.8	2.2	35.5	4077	2083
120	1.20	1.2	2.00	2.4	41.5	5698	3145	4 X 0.8	2.3	39.0	5088	2535
150	1.40	1.4	2.50	2.5	46.5	7156	4049	4 X 0.8	2.5	43.0	6086	2978
185	1.60	1.4	2.50	2.7	51.5	8656	4804	4 X 0.8	2.7	48.0	7467	3614
240	1.70	1.6	2.50	2.9	57.5	10769	5808	4 X 0.8	2.9	54.0	9448	4487
300	1.80	1.6	2.50	3.0	61.5	12920	6713	4 X 0.8	3.1	58.5	11547	5339
400	2.00	1.6	3.15	3.3	69.0	17096	8806	4 X 0.8	3.4	65.0	14901	6611

## IEC 60502-1 0.6/1.0 KV Four Cores XLPE/PVC/RWA/PVC XLPE/PVC/FSA/PVC

Nominal cross sectional area mm <sup>2</sup>	Nominal thickness of insulation mm	Approx. Thickness of bedding mm	Nominal G.I. armour wire diameter mm	Nominal Thickness of outer sheath mm	Approx. overall diameter mm	Approx. Copper Cable weight Kg/Km	Approx. Alu. Cable weight Kg/Km	Nominal dimension G.I. Flat Strip. mm	Nominal Thickness of outer sheath mm	Approx. overall diameter mm	Approx. Copper Cable weight Kg/Km	Approx. Alu. Cable weight Kg/Km
1.5	0.7	1.0	0.8	1.8	15.5	393.2	340.5					
2.5	0.7	1.0	0.8	1.8	16.5	465.8	378.6					
4.0	0.7	1.0	0.8	1.8	18.0	574.0	480.1					
6.0	0.7	1.0	1.25	1.8	20.0	828.7	680.6					
10	0.7	1.0	1.25	1.8	22.5	1076.1	832.1					
16	0.7	1.0	1.60	1.8	25.5	1525.3	1149.3					
25	0.90	1.0	1.60	1.8	25.0	1761.2	1172.2	4 X 0.8	1.8	23.5	1539.3	950.2
35	0.90	1.0	1.60	1.9	27.0	2201.1	1370.4	4 X 0.8	1.8	25.0	1944.8	1114.1
50	1.00	1.0	1.60	2.0	30.5	2893.0	1680.7	4 X 0.8	1.9	29.0	2615.4	1403.0
70	1.10	1.2	2.00	2.2	35.5	4033.8	2356.7	4 X 0.8	2.1	33.0	3490.0	1812.8
95	1.10	1.2	2.00	2.3	39.5	5141.9	2887.4	4 X 0.8	2.2	37.0	4523.5	2269.0
120	1.20	1.4	2.50	2.5	44.5	6630.8	3784.3	4 X 0.8	2.3	40.5	5587.7	2741.2
150	1.40	1.4	2.50	2.6	47.5	7952.6	4367.4	4 X 0.8	2.5	44.0	6847.2	3262.0
185	1.60	1.4	2.50	2.8	53.0	9565.0	5180.3	4 X 0.8	2.7	49.5	8338.3	3953.6
240	1.70	1.6	2.50	3.0	59.0	11941.3	6276.7	4 X 0.8	2.9	55.5	10580.0	4915.3
300	1.80	1.6	2.50	3.2	65.0	14495.5	7415.0	4 X 0.8	3.1	61.0	12999.4	5918.8
400	2.00	1.8	3.15	3.5	74.0	19476.0	9883.9	4 X 0.8	3.4	69.0	16990.5	7398.4

## IEC 60502-1 0.6/1.0 KV Control Cables Cu/XLPE/PVC/RWA/PVC Cu/XLPE/PVC/FSA/PVC

No. of cores	Nominal cross sectional area mm <sup>2</sup>	Nominal thickness of insulation mm	Approx. Thickness of bedding mm	Nominal G.I. armour wire diameter mm	Nominal Thickness of outer sheath mm	Approx. overall diameter Kg/Km	Approx. Copper Cable weight Kg/Km	Nominal dimension G.I. Flat Strip. mm	Nominal Thickness of outer sheath mm	Approx. overall diameter mm	Approx. Copper Cable weight Kg/Km
2	1.5	0.7	1.0	0.8	1.8	14.0	334				
3	1.5	0.7	1.0	0.8	1.8	14.5	360				
4	1.5	0.7	1.0	0.8	1.8	15.5	404				
5	1.5	0.7	1.0	0.8	1.8	16.5	452				
6	1.5	0.7	1.0	0.8	1.8	17.5	503				
7	1.5	0.7	1.0	0.8	1.8	17.5	511				
10	1.5	0.7	1.0	1.3	1.8	21.5	838				
12	1.5	0.7	1.0	1.25	1.8	22.0	885				
14	1.5	0.7	1.0	1.25	1.8	22.5	954	4 X 0.8	1.8	21.5	872
16	1.5	0.7	1.0	1.25	1.8	23.5	1031	4 X 0.8	1.8	22.5	930
19	1.5	0.7	1.0	1.25	1.8	24.5	1118	4 X 0.8	1.8	23.5	1023
24	1.5	0.7	1.0	1.6	1.8	28.0	1543	4 X 0.8	1.8	26.5	1277
27	1.5	0.7	1.0	1.6	1.8	28.5	1593	4 X 0.8	1.8	27.0	1352
30	1.5	0.7	1.0	1.6	1.8	29.5	1695	4 X 0.8	1.8	28.0	1423
37	1.5	0.7	1.0	1.6	1.8	31.5	1910	4 X 0.8	1.8	29.5	1616
40	1.5	0.7	1.0	1.6	1.9	32.5	2046	4 X 0.8	1.8	31.0	1731
43	1.5	0.7	1.0	1.6	1.9	33.5	2172	4 X 0.8	1.8	32.0	1850
47	1.5	0.7	1.0	1.6	1.9	34.5	2307	4 X 0.8	1.9	33.0	1993

No. of cores	Nominal cross sectional area mm <sup>2</sup>	Nominal thickness of insulation mm	Approx. Thickness of bedding mm	Nominal G.I. armour wire diameter mm	Nominal Thickness of outer sheath mm	Approx. overall diameter Kg/Km	Approx. Copper Cable weight Kg/Km	Nominal dimension G.I. Flat Strip. mm	Nominal Thickness of outer sheath mm	Approx. overall diameter mm	Approx. Copper Cable weight Kg/Km
2	2.5	0.7	1.0	0.8	1.8	15.0	378				
3	2.5	0.7	1.0	0.8	1.8	15.5	418				
4	2.5	0.7	1.0	0.8	1.8	16.5	477				
5	2.5	0.7	1.0	0.8	1.8	17.5	537				
6	2.5	0.7	1.0	1.25	1.8	19.5	731				
7	2.5	0.7	1.0	1.25	1.8	19.5	746				
10	2.5	0.7	1.0	1.25	1.8	23.0	1003	4 X 0.8	1.8	22.0	922
12	2.5	0.7	1.0	1.25	1.8	23.5	1077	4 X 0.8	1.8	22.5	977
14	2.5	0.7	1.0	1.25	1.8	24.5	1167	4 X 0.8	1.8	23.5	1072
16	2.5	0.7	1.0	1.6	1.8	26.0	1406	4 X 0.8	1.8	24.5	1178
19	2.5	0.7	1.0	1.6	1.8	27.0	1536	4 X 0.8	1.8	25.5	1301
24	2.5	0.7	1.0	1.6	1.8	30.5	1905	4 X 0.8	1.8	29.0	1627
27	2.5	0.7	1.0	1.6	1.8	31.0	1997	4 X 0.8	1.8	29.5	1703
30	2.5	0.7	1.0	1.6	1.9	32.5	2129	4 X 0.8	1.8	30.5	1830
37	2.5	0.7	1.0	1.6	1.9	34.5	2434	4 X 0.8	1.9	32.5	2111
40	2.5	0.7	1.0	1.6	2.0	35.5	2608	4 X 0.8	1.9	34.0	2262
43	2.5	0.7	1.0	2.0	2.0	37.5	3009	4 X 0.8	1.9	35.0	2419
47	2.5	0.7	1.2	2.0	2.1	39.5	3254	4 X 0.8	2.0	37.0	2638





## Rating Factors

Where the conditions of installation differ from those defined in the current rating tables, the following rating factors may be used for cables size selection.

### Cables Laid Directly in Ground

Ratings for cables installed directly in the ground are based on values of soil temperature and soil thermal resistivity which are generally representative of conditions in the United Kingdom. Rating factors to take account of variation in ground temperatures are given in Table 2. Where conditions of operation can be fairly accurately estimated and knowledge of the soil along the route is available, it is possible to determine the ratings more precisely by the use of the soil thermal resistivity factors, grouping factors, and factors for the depths of laying given in Tables 3 to 6.

Table-2

Rating Factors for Ground Temperature							
Ground temperature	15°C	20°C	25°C	30°C	35°C	40°C	45°C
Cable Type	Rating factor						
XLPE Insulated	1.0	0.97	0.93	0.89	0.86	0.82	0.76

Table-3

Rating Factors for Variation in Thermal Resistivity of Soil (Average Values)							
Size of cables mm <sup>2</sup>	Soil thermal resistivity in °C m/W						
	0.8	0.9	1.0	1.5	2.0	2.5	3.0
Single core cables							
Up to 150	1.16	1.12	1.07	0.91	0.81	0.73	0.66
From 185 to 300	1.17	1.12	1.07	0.91	0.80	0.73	0.66
From 400 to 1000	1.17	1.12	1.07	0.91	0.80	0.73	0.66
Multicore cables							
Up to 16	1.12	1.08	1.05	0.93	0.84	0.77	0.72
From 25 to 150	1.14	1.10	1.06	0.92	0.82	0.75	0.69
From 185 to 500	1.15	1.10	1.07	0.92	0.81	0.74	0.67



Table - 4

### Rating Factors for Depth of Laying (To Centre of Cable or Trefoil Group of Cables)

Depth of laying m	600/1000 Volt			1900/3300 Volt	
	Up to 50 mm <sup>2</sup>	70 mm <sup>2</sup> to 300 mm <sup>2</sup>	Above 300 mm <sup>2</sup>	Up to 300 mm <sup>2</sup>	Above 300 mm <sup>2</sup>
0.50	1.00	1.00	1.00	-	-
0.60	0.99	0.98	0.97	-	-
0.80	0.97	0.96	0.94	1.00	1.00
1.00	0.95	0.93	0.92	0.98	0.97
1.25	0.94	0.92	0.89	0.96	0.95
1.50	0.93	0.90	0.87	0.95	0.93
1.75	0.92	0.89	0.86	0.94	0.91
2.00	0.91	0.88	0.85	0.92	0.89
2.50	0.90	0.87	0.84	0.91	0.88
3.00 or more	0.89	0.85	0.82	0.90	0.86

Table - 5

### Group rating factors for circuits of three single core cables in trefoil or laid flat Touching, in horizontal formation

Number of Circuits	Spacing of Circuits						
	Touching**		0.15 m*	0.30 m	0.45 m	0.60 m	
	Trefoil	Laid flat					
600/1000 Volt cables	2	0.78	0.81	0.83	0.88	0.91	0.93
	3	0.66	0.70	0.73	0.79	0.84	0.87
	4	0.61	0.64	0.68	0.73	0.81	0.85
	5	0.56	0.60	0.64	0.73	0.79	0.85
	6	0.53	0.57	0.61	0.71	0.78	0.82
1900/3300 Volt cables	2	0.78	0.80	0.82	0.86	0.89	0.91
	3	0.66	0.68	0.71	0.77	0.80	0.83
	4	0.59	0.62	0.65	0.72	0.77	0.80
	5	0.55	0.58	0.61	0.68	0.74	0.78
	6	0.52	0.55	0.58	0.66	0.72	0.76

\* This spacing will not be possible for some of the larger diameter cables.

\*\* For high current carrying cables (i.e. large size) it is advisable to allow spacing between circuits.

Alternatively the most appropriate group rating factor must be applied when determining the cable size and required number of cables in parallel.

Table - 6

### Group Rating Factors for Multicore Cables in Horizontal Formation

Number of Cables in Group	Spacing					
	Touching**	0.15 m*	0.30 m	0.45 m	0.60 m	
	600/1000 Volt cables	2	0.81	0.87	0.91	0.93
	3	0.70	0.78	0.84	0.88	0.90
	4	0.63	0.74	0.81	0.86	0.89
	5	0.59	0.70	0.78	0.84	0.87
	6	0.55	0.68	0.77	0.83	0.87
1900/3300 Volt cables	2	0.80	0.85	0.89	0.91	0.93
	3	0.68	0.76	0.81	0.84	0.87
	4	0.62	0.71	0.77	0.81	0.84
	5	0.57	0.66	0.73	0.78	0.82
	6	0.54	0.64	0.71	0.77	0.81

\* For high current carrying cables (i.e. large size) it is advisable to allow spacing between circuits.

Alternatively the most appropriate group rating factor must be applied when determining the cable size and required number of cables in parallel.

### Cables Installed in Ducts

The term ducts applies to single way earthenware, fibre or ferrous pipes.

Table - 7

### Recommended Duct Dimensions and Cable Sizes

Overall cable diameter mm	Duct	
	Inside diameter mm	Outside diameter mm
Up to and including 65	100	130
Above 65 up to and including 90	125	160

Ratings for cables installed in single way ducts, underground, have been based on values of soil temperature and soil thermal resistivity which are generally representative of conditions in the United Kingdom. Rating factors to take account of variations in ground temperatures are given in Table 2. Where conditions of operation can be fairly accurately estimated, and knowledge of the soil along the route is available, it is possible to determine the ratings more precisely by the use of estimated maximum ground temperature, the soil thermal resistivity factors, grouping factors, and factors for the depths of laying given.

### Rating Factors for Ground Temperature

Note: Same as for direct in ground.



Table - 8

### Rating factors of variation in thermal resistivity of soil (Average Values)

Size of cable mm <sup>2</sup>	Soil thermal resistivity in °C m/W						
	0.8	0.9	1.0	1.5	2.0	2.5	3.0
Single Core Cable							
Up to 150	1.10	1.07	1.04	0.94	0.86	0.80	0.76
From 185 to 300	1.11	1.08	1.05	0.93	0.85	0.79	0.75
From 400 to 1000	1.12	1.08	1.05	0.93	0.84	0.78	0.74
Multicore Cables							
Up to 16	1.04	1.03	1.02	0.97	0.92	0.88	0.86
From 25 to 150	1.06	1.04	1.03	0.95	0.90	0.85	0.81
From 185 to 500	1.07	1.05	1.03	0.95	0.88	0.83	0.78


Table - 9

### Rating factors of depth of laying (to centre of duct or trefoil Group of ducts)

Depth in laying m	600/1000 Volt		1900/3300 Volt	
	Single Core	Multicore	Single Core	Multicore
0.50	1.00	1.00	-	-
0.60	0.98	0.99	-	-
0.80	0.95	0.98	1.00	1.00
1.00	0.93	0.96	0.98	0.99
1.25	0.91	0.95	0.95	0.97
1.50	0.89	0.94	0.93	0.96
1.75	0.88	0.94	0.92	0.95
2.00	0.87	0.93	0.90	0.94
2.50	0.86	0.92	0.89	0.93
3.00 or more	0.85	0.91	0.88	0.92

Table - 10


### Group Rating Factors for Single Core Cables in Trefoil Single Way Ducts, Horizontal Formation (Average Values)

Number of Circuits				
	Spacing			
	Touching*	0.45 m	0.60 m	
600/1000 Volt Cables	2	0.87	0.91	0.93
	3	0.78	0.84	0.87
	4	0.74	0.81	0.85
	5	0.70	0.79	0.83
	6	0.69	0.78	0.82
1900/3300 Volt Cables	2	0.85	0.88	0.90
	3	0.75	0.80	0.83
	4	0.70	0.77	0.80
	6	0.64	0.72	0.76

For high current carrying cables (i.e. large size) it is advisable to allow spacing between circuits. Alternatively the most appropriate group rating factor must be applied when determining the cable size and required number of cables in parallel.

Table - 11

### Group Rating Factors for Multicore Cables in Single Way Ducts, Horizontal Formation (Average Values)

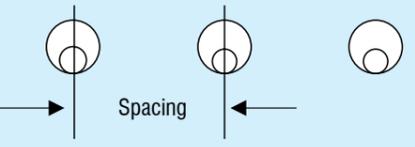Number of Circuits					
	Spacing				
	Touching*	0.30 m	0.45 m	0.60 m	
600/1000 Volt Cables	2	0.90	0.93	0.95	0.96
	3	0.83	0.88	0.91	0.93
	4	0.79	0.85	0.89	0.92
	5	0.75	0.83	0.88	0.91
	6	0.73	0.82	0.87	0.90
1900/3300 Volt Cables	2	0.88	0.91	0.93	0.94
	3	0.80	0.85	0.88	0.90
	4	0.76	0.81	0.85	0.88
	5	0.72	0.78	0.83	0.86
	6	0.69	0.76	0.81	0.85

\* For high current carrying cables (i.e. large size) it is advisable to allow spacing between circuits. Alternatively the most appropriate group rating factor must be applied when determining the cable size and required number of cables in parallel.

### Cables Installed in Air

It is anticipated that many of the "in air" installations will be in buildings, and the ratings are therefore given in accordance with IEE Wiring Regulations for Electrical Installations, 16th Edition.

It should be noted that all ratings for cables run in free air have been based on the assumption that they are shielded from the direct rays of the sun without restriction of ventilation. The rating for cables subjected to direct sunlight should be reduced to take account of this factor and further guidance on this subject is available on request.

Table - 12

### Rating Factors for other Ambient Air Temperatures

Air Temperature	25°C	30°C	35°C	40°C	45°C	50°C	55°C
XLPE Insulated	1.02	1.0	0.96	0.91	0.87	0.82	0.76

### Defined Conditions of Installation

The 'in-air' current ratings given in relevant Tables are based on the installation conditions in air as follows:

#### (a) Single core cables

- Two single core cables are installed one above the other, fixed to the vertical surface of a wall or open cable trench, the distance between the wall and the surface of the cable being not less than 20 mm.  
Cables are installed at a distance between centres of twice the overall diameter of the cable, i.e. 2D, where D = overall diameter of cable.
- Three single core cables are installed in trefoil formation, fixed to the vertical surface of a wall or open cable trench, the cables touching throughout and the distance between the wall and the surface of the nearest cable being not less than 20mm. The cables are assumed to be remote from iron, steel or ferro-concrete, other than the cable supports. Single core armoured cables to be electrically bonded at each end of the run.

#### (b) Multicore Cables

Cables of all types other than single core cables are installed singly, fixed to the vertical surface of a wall or open cable trench, the distance between the surface of the cable and the wall being not less than 20 mm in every instance. If it is necessary for cables to be installed at distances less than those described above, then the values tabulated under the heading "Clipped direct to a surface..." in the IEE Wiring Regulations should be employed.



## Current Ratings (AC)

### Stranded Copper & Aluminium Conductors – Single Core Cables 600/1000 C Armoured PVC Sheathed Cables

Nominal area of conductor mm <sup>2</sup>	Stranded Copper Conductors						Stranded Aluminium Conductors					
	Current Ratings			Approximate voltage drop per ampere per metre			Current Ratings			Approximate voltage drop per ampere per metre		
	Direct in ground amps	In single way ducts amps	3D Installed in air amps	Ground mV	Duct mV	Air mV	Direct in ground amps	In single way ducts amps	3D Installed in air amps	Ground mV	Duct mV	Air mV
50	235	235	222	0.87	0.93	0.87	175	180	162	1.40	1.60	1.40
70	290	280	285	0.62	0.70	0.62	220	220	207	0.98	1.00	0.98
95	345	330	346	0.47	0.56	0.47	260	260	252	0.72	0.79	0.74
120	390	370	402	0.39	0.48	0.39	295	295	292	0.58	0.66	0.60
150	435	405	463	0.33	0.43	0.33	330	330	337	0.48	0.57	0.49
185	490	440	529	0.28	0.39	0.28	375	365	391	0.39	0.49	0.41
240	560	500	625	0.24	0.35	0.24	435	410	465	0.31	0.42	0.34
300	630	550	720	0.21	0.32	0.21	490	455	540	0.27	0.38	0.29
400	700	580	815	0.20	0.30	0.20	540	480	625	0.35	0.38	0.25
500	770	620	918	0.18	0.28	0.18	580	510	714	0.31	0.35	0.22
630	840	670	1027	0.17	0.26	0.17	630	540	801	0.28	0.32	0.20
800	888	692	1119	0.17	0.25	0.17	-	-	-	-	-	-
1000	942	735	1214	0.16	0.24	0.16	-	-	-	-	-	-

### 600/1000 V Unarmoured PVC Sheathed Cables

Nominal area of conductor mm <sup>2</sup>	Stranded Copper Conductors						Stranded Aluminium Conductors					
	Current Ratings			Approximate voltage drop per ampere per metre			Current Ratings			Approximate voltage drop per ampere per metre		
	Direct in ground amps	In single way ducts amps	3D Installed in air amps	Ground mV	Duct mV	Air mV	Direct in ground amps	In single way ducts amps	3D Installed in air amps	Ground mV	Duct mV	Air mV
50	230	240	209	0.85	0.93	0.87	175	180	159	1.40	1.50	1.45
70	285	295	270	0.61	0.70	0.61	215	220	206	0.98	1.10	0.98
95	335	345	330	0.45	0.56	0.45	255	260	253	0.71	0.79	0.73
120	385	395	385	0.36	0.48	0.37	295	300	296	0.57	0.66	0.59
150	435	445	445	0.31	0.43	0.31	325	335	343	0.47	0.57	0.47
185	490	500	511	0.26	0.39	0.26	370	375	395	0.39	0.49	0.39
240	570	580	606	0.22	0.35	0.22	430	440	471	0.31	0.42	0.32
300	650	650	701	0.19	0.32	0.20	490	510	544	0.26	0.38	0.27
400	740	750	820	0.17	0.30	0.18	550	570	638	0.36	0.38	0.23
500	840	850	936	0.16	0.28	0.16	620	640	743	0.33	0.35	0.20
630	960	960	1069	0.15	0.26	0.15	690	730	849	0.28	0.32	0.19
800	1120	1130	1214	0.15	0.25	0.15	-	-	-	-	-	-
1000	1300	1320	1349	0.14	0.24	0.14	-	-	-	-	-	-

Direct in ground - Trefoil touching  
 Single way ducts - ducts touching  
 Spacing in air - As shown above (D = Cable diameter)  
 Non magnetic wire armour bonded at both ends

Installation conditions for above ratings: Ambient air temperature: 30°C  
 Depth of laying: 0.5 m  
 Soil thermal resistivity: 1.2°C m/W  
 Maximum conductor operating temperature at rated current is 90°C For rating factors see Tables 2 to 6 and 8 to 12

## Current Ratings (AC)

### Stranded Copper & Aluminium Conductors – Two Core Cables 600/1000 V Armoured PVC Sheathed Cables

Nominal area of conductor mm <sup>2</sup>	Stranded Copper Conductors						Stranded Aluminium Conductors					
	Current Ratings			Approximate voltage drop per ampere per metre			Current Ratings			Approximate voltage drop per ampere per metre		
	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV
16*	140	115	115	2.9	2.9	2.9	-	-	-	-	-	-
25*	180	145	152	1.9	1.9	1.9	135	110	112	3.1	3.1	3.1
35*	215	175	188	1.3	1.3	1.3	165	130	138	2.2	2.2	2.2
50	255	210	288	1.0	1.0	1.0	195	155	166	1.7	1.7	1.7
70	315	260	291	0.7	0.7	0.7	240	195	211	1.1	1.1	1.1
95	381	313	354	0.5	0.5	0.5	288	237	254	0.8	0.8	0.8
120	410	344	430	0.4	0.4	0.4	-	-	-	-	-	-
150	472	384	480	0.4	0.4	0.4	-	-	-	-	-	-
185	539	432	540	0.3	0.3	0.3	-	-	-	-	-	-
240	632	504	636	0.2	0.2	0.2	-	-	-	-	-	-
300	708	560	732	0.2	0.2	0.2	-	-	-	-	-	-
800	888	692	1119	0.17	0.25	0.17	-	-	-	-	-	-
1000	942	735	1214	0.16	0.24	0.16	-	-	-	-	-	-

\* Circular conductor, all others are sector shaped

### 600/1000 V Unarmoured PVC Sheathed Cables

Nominal area of conductor mm <sup>2</sup>	Stranded Copper Conductors						Stranded Aluminium Conductors					
	Current Ratings			Approximate voltage drop per ampere per metre			Current Ratings			Approximate voltage drop per ampere per metre		
	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV
16*	140	115	115	2.9	2.9	2.9	-	-	-	-	-	-
25*	180	140	149	1.9	1.9	1.9	135	105	108	3.1	3.1	3.1
35*	215	170	185	1.3	1.3	1.3	165	130	135	2.2	2.2	2.2
50	255	205	225	1.0	1.0	1.0	195	150	164	1.7	1.7	1.7
70	315	255	289	0.7	0.7	0.7	240	195	211	1.2	1.2	1.2
95	380	311	352	0.5	0.5	0.5	285	235	257	0.8	0.8	0.8
120	410	344	430	0.4	0.4	0.4	-	-	-	-	-	-
150	473	384	480	0.4	0.4	0.4	-	-	-	-	-	-
185	542	432	540	0.3	0.3	0.3	-	-	-	-	-	-
240	641	504	650	0.2	0.2	0.2	-	-	-	-	-	-
300	741	560	750	0.2	0.2	0.2	-	-	-	-	-	-

Direct in ground - Cables touching Single way ducts - ducts touching  
 \* Circular conductors, all others are sector shaped  
 Note: (1) 50mm<sup>2</sup> and above are with D-shaped conductor  
 (2) Unarmoured cables are as per IEC 60502 - 1

Installation conditions for above ratings:  
 Ambient air temperature: 30°C  
 Ground temperature: 15°C, Depth of laying: 0.5 m  
 Soil thermal resistivity: 1.2°C m/W  
 Maximum conductor operating temperature at rated current is 90°C  
 For rating factors see Tables 2 to 6 and 8 to 12

## Current Ratings (AC)

### Stranded Copper & Aluminium Conductors – Three Core Cables 600/1000 V Armoured PVC Sheathed Cables

Nominal area of conductor mm <sup>2</sup>	Stranded Copper Conductors						Stranded Aluminium Conductors					
	Current Ratings			Approximate voltage drop per ampere per metre			Current Ratings			Approximate voltage drop per ampere per metre		
	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV
16	115	94	99	2.5	2.5	2.5	89	72	74	4.2	4.2	4.2
25	150	125	131	1.7	1.7	1.7	115	94	98	2.7	2.7	2.7
35	180	150	162	1.2	1.2	1.2	135	110	120	1.9	1.9	1.9
50	215	175	197	0.9	0.9	0.9	165	135	145	1.4	1.4	1.4
70	265	215	251	0.6	0.6	0.6	200	165	185	1.0	1.0	1.0
95	315	260	304	0.5	0.5	0.5	240	200	224	0.7	0.7	0.7
120	360	300	353	0.4	0.4	0.4	275	230	264	0.6	0.6	0.6
150	405	435	406	0.3	0.3	0.3	310	255	305	0.5	0.5	0.5
185	460	380	463	0.3	0.3	0.3	350	295	350	0.4	0.4	0.4
240	530	440	546	0.2	0.2	0.2	410	340	418	0.3	0.3	0.3
300	590	495	628	0.2	0.2	0.2	460	385	488	0.3	0.3	0.3
400	667	570	728	0.2	0.2	0.2	520	443	562	0.2	0.2	0.2

### 600/1000 V Unarmoured PVC Sheathed Cables

Nominal area of conductor mm <sup>2</sup>	Stranded Copper Conductors						Stranded Aluminium Conductors					
	Current Ratings			Approximate voltage drop per ampere per metre			Current Ratings			Approximate voltage drop per ampere per metre		
	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV
16	120	93	100	2.5	2.5	2.5	-	-	-	-	-	-
25	145	125	127	1.7	1.7	1.7	115	92	97	2.7	2.7	2.7
35	180	145	158	1.2	1.2	1.2	135	110	120	1.9	1.9	1.9
50	215	175	192	0.9	0.9	0.9	165	135	146	1.4	1.4	1.4
70	265	215	246	0.6	0.6	0.6	200	165	187	1.0	1.0	1.0
95	315	255	298	0.5	0.5	0.5	240	195	227	0.7	0.7	0.7
120	365	300	346	0.4	0.4	0.4	275	225	263	0.6	0.6	0.6
150	405	330	399	0.3	0.3	0.3	310	255	304	0.5	0.5	0.5
185	465	380	456	0.3	0.3	0.3	350	290	347	0.4	0.4	0.4
240	540	440	538	0.2	0.2	0.2	415	340	409	0.3	0.3	0.3
300	600	500	621	0.2	0.2	0.2	465	385	471	0.3	0.3	0.3
400	675	575	741	0.2	0.2	0.2	523	443	570	0.2	0.2	0.2

Direct in ground - Cables touching  
 Single way ducts - ducts touching  
 \* Circular conductors, all others are sector shaped  
 Note: Unarmoured cables are as per IEC 60502 - 1

Installation conditions for above ratings:  
 Ambient air temperature:30°C  
 Ground temperature: 15°C, Depth of laying:0.5 m  
 Soil thermal resistivity: 1.2°C m/W  
 Maximum conductor operating temperature at rated current is 90°C  
 For rating factors see Tables 2 to 6 and 8 to 12

## Current Ratings (AC)

### Stranded Copper & Aluminium Conductors – Four Core Cables 600/1000 V Armoured PVC Sheathed Cables

Nominal area of conductor mm <sup>2</sup>	Stranded Copper Conductors						Stranded Aluminium Conductors					
	Current Ratings			Approximate voltage drop per ampere per metre			Current Ratings			Approximate voltage drop per ampere per metre		
	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV
16	115	94	99	2.5	2.5	2.5	89	72	74	4.2	4.2	4.2
25	150	125	131	1.7	1.7	1.7	115	94	98	2.7	2.7	2.7
35	180	150	162	1.2	1.2	1.2	135	110	120	1.9	1.9	1.9
50	215	175	197	0.9	0.9	0.9	165	135	145	1.4	1.4	1.4
70	265	215	251	0.6	0.6	0.6	200	165	185	1.0	1.0	1.0
95	315	260	304	0.5	0.5	0.5	240	200	224	0.7	0.7	0.7
120	360	300	353	0.4	0.4	0.4	275	230	264	0.6	0.6	0.6
150	405	335	406	0.3	0.3	0.3	310	255	305	0.5	0.5	0.5
185	460	380	463	0.3	0.3	0.3	350	295	350	0.4	0.4	0.4
240	530	440	546	0.2	0.2	0.2	410	340	418	0.3	0.3	0.3
300	590	495	628	0.2	0.2	0.2	460	385	488	0.3	0.3	0.3
400	667	570	728	0.2	0.2	0.2	520	443	562	0.2	0.2	0.2
500	720	605	800	0.2	0.2	0.2	561	470	618	0.2	0.2	0.2

### 600/1000 V Unarmoured PVC Sheathed Cables

Nominal area of conductor mm <sup>2</sup>	Stranded Copper Conductors						Stranded Aluminium Conductors					
	Current Ratings			Approximate voltage drop per ampere per metre			Current Ratings			Approximate voltage drop per ampere per metre		
	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV
16	120	93	100	2.5	2.5	2.5	89	72	74	4.2	4.2	4.2
25	145	125	127	1.7	1.7	1.7	115	92	97	2.7	2.7	2.7
35	180	145	158	1.2	1.2	1.2	135	110	120	1.9	1.9	1.9
50	215	175	192	0.9	0.9	0.9	165	135	146	1.4	1.4	1.4
70	265	215	246	0.6	0.6	0.6	200	165	187	1.0	1.0	1.0
95	315	255	298	0.5	0.5	0.5	240	195	227	0.7	0.7	0.7
120	365	300	346	0.4	0.4	0.4	275	225	263	0.6	0.6	0.6
150	405	335	406	0.3	0.3	0.3	310	255	305	0.5	0.5	0.5
185	405	330	399	0.3	0.3	0.3	310	255	304	0.4	0.4	0.4
240	465	380	456	0.2	0.2	0.2	350	290	347	0.3	0.3	0.3
300	600	500	621	0.2	0.2	0.2	465	385	471	0.3	0.3	0.3
400	675	575	741	0.2	0.2	0.2	523	443	570	0.2	0.2	0.2
500	730	610	814	0.2	0.2	0.2	565	470	626	0.2	0.2	0.2

Direct in ground - Cables touching  
 Single way ducts - ducts touching  
 \* Circular conductors, all others are sector shaped  
 Note: Unarmoured cables are as per IEC 60502 - 1

Installation conditions for above ratings:  
 Ambient air temperature:30°C  
 Ground temperature: 15°C, Depth of laying:0.5 m  
 Soil thermal resistivity: 1.2°C m/W  
 Maximum conductor operating temperature at rated current is 90°C  
 For rating factors see Tables 2 to 6 and 8 to 12

## Current Ratings (AC)

### Stranded Copper & Aluminium Conductors Four Core Cables with Reduced Neutral Conductor 600/1000 V Armoured PVC Sheathed Cables

Nominal area of conductor mm <sup>2</sup>	Nominal area of neutral conductor mm <sup>2</sup>	Stranded Copper Conductors						Aluminium Conductors					
		Current Ratings			Approximate voltage drop per ampere per metre			Current Ratings			Approximate voltage drop per ampere per metre		
		Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV
25	16*	150	125	131	1.7	1.7	1.7	115	94	98	2.7	2.7	2.7
35	16*	180	150	162	1.2	1.2	1.2	135	110	120	1.9	1.9	1.9
50	25*	215	175	197	0.9	0.9	0.9	165	135	145	1.4	1.4	1.4
70	35*	265	215	251	0.6	0.6	0.6	200	165	185	1.0	1.0	1.0
95	50	315	260	304	0.5	0.5	0.5	240	200	224	0.7	0.7	0.7
120	70	360	300	353	0.4	0.4	0.4	275	230	264	0.6	0.6	0.6
150	70*	405	335	406	0.3	0.3	0.3	310	255	305	0.5	0.5	0.5
185	95	460	380	463	0.3	0.3	0.3	350	295	350	0.4	0.4	0.4
240	120*	530	440	546	0.2	0.2	0.2	410	340	418	0.3	0.3	0.3
300	150*	590	495	628	0.2	0.2	0.2	460	385	488	0.3	0.3	0.3
400	185*	667	570	728	0.2	0.2	0.2	520	443	562	0.2	0.2	0.2
500	240*	720	605	800	0.2	0.2	0.2	561	470	618	0.2	0.2	0.2

### 600/1000 V Unarmoured PVC Sheathed Cables

Nominal area of conductor mm <sup>2</sup>	Nominal area of neutral conductor mm <sup>2</sup>	Stranded Copper Conductors						Aluminium Conductors					
		Current Ratings			Approximate voltage drop per ampere per metre			Current Ratings			Approximate voltage drop per ampere per metre		
		Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV	Direct in ground amps	In single way ducts amps	Installed in air amps	Ground mV	Duct mV	Air mV
25	16*	145	125	127	1.7	1.7	1.7	115	92	97	2.7	2.7	2.7
35	16*	180	145	158	1.2	1.2	1.2	135	110	120	1.9	1.9	1.9
50	25*	215	175	192	0.9	0.9	0.9	165	135	146	1.4	1.4	1.4
70	35*	265	215	246	0.6	0.6	0.6	200	165	187	1.0	1.0	1.0
95	50	315	255	298	0.5	0.5	0.5	240	195	227	0.7	0.7	0.7
120	70	365	300	346	0.4	0.4	0.4	275	225	263	0.6	0.6	0.6
150	70*	405	330	399	0.3	0.3	0.3	310	255	304	0.5	0.5	0.5
185	95	465	380	456	0.3	0.3	0.3	350	290	347	0.4	0.4	0.4
240	120*	540	440	538	0.2	0.2	0.2	415	340	409	0.3	0.3	0.3
300	150*	600	500	621	0.2	0.2	0.2	465	385	471	0.3	0.3	0.3
400	185*	675	575	741	0.2	0.2	0.2	523	443	570	0.2	0.2	0.2
500	240*	730	610	814	0.2	0.2	0.2	565	470	626	0.2	0.2	0.2

Direct in ground - Cables touching  
 Single way ducts - ducts touching  
 \* Circular conductors, all others are sector shaped  
 Note: Unarmoured cables are as per IEC 60502 - 1

Installation conditions for above ratings:  
 Ambient air temperature:30°C  
 Ground temperature: 15°C, Depth of laying:0.5 m  
 Soil thermal resistivity: 1.2°C m/W  
 Maximum conductor operating temperature at rated current is 90°C  
 For rating factors see Tables 2 to 6 and 8 to 12

## XLPE Insulated Cables to BS 5467 & IEC - 60502 - 1

### Current Ratings (AC) and Volt Drops Stranded Copper Conductors 600/1000 V Three and Four Core Armoured, PVC Sheathed Cables

Conductor size mm <sup>2</sup>	Current in air A	Voltage drop mV/A/m	Current in ground A	Conductor size mm <sup>2</sup>	Current in air A	Voltage drop mV/A/m	Current in ground A
16	99	2.50	115	50	197	0.865	215
	97	2.50	112		190	.852	210
	93	2.47	110		180	0.839	200
	89	2.43	105		175	0.826	195
	84	2.39	100		165	0.813	190
	80	2.35	97		155	0.800	185
	74	2.31	94		145	0.787	175
	68	2.27	89		135	0.774	165
	62	2.23	84		120	0.761	155
	25	131	1.65		150	70	251
130		1.59	145	240	0.599		260
125		1.56	140	230	0.589		250
120		1.54	135	220	0.580		245
110		1.51	130	210	0.572		235
105		1.49	125	195	0.562		225
99		1.46	120	185	0.554		215
91		1.44	115	170	0.545		205
82		1.41	110	150	0.536		195
35		162	1.15	180	95		304
	155	1.15	175	295		0.439	305
	150	1.13	170	290		0.433	300
	145	1.11	165	270		0.427	290
	135	1.09	160	255		0.421	280
	130	1.08	150	240		0.415	270
	120	1.06	145	225		0.408	255
	110	1.04	140	210		0.402	245
	100	1.02	130	190		0.396	230

Conductor size mm <sup>2</sup>	Current in air A	Voltage drop mV/A/m	Current in ground A	Conductor size mm <sup>2</sup>	Current in air A	Voltage drop mV/A/m	Current in ground A
120	353	0.366	360	240	546	0.211	530
	340	0.357	350		530	0.208	515
	325	0.352	340		510	0.206	500
	310	0.347	330		490	0.204	485
	300	0.342	320		465	0.203	470
	280	0.337	305		440	0.200	450
	260	0.333	295		410	0.199	430
	240	0.328	280		375	0.197	410
	215	0.323	260		340	0.195	385
	150	406	0.303		405	300	628
395		0.299	395	605	0.183		575
375		0.295	385	580	0.181		560
365		0.292	370	555	0.180		540
345		0.288	360	530	0.179		520
325		0.284	345	500	0.177		500
305		0.280	330	465	0.176		480
280		0.277	315	430	0.174		455
250		0.273	295	390	0.174		430
185		463	0.255	460	400		728
	450	0.252	450	715		0.163	640
	430	0.249	435	685		0.162	620
	415	0.246	420	655		0.161	600
	395	0.243	405	620		0.160	580
	370	0.240	390	585		0.159	560
	345	0.237	375	545		0.158	535
	320	0.235	355	500		0.157	505
	290	0.232	335	450		0.156	475

Installation conditions for above ratings:  
Ambient temperature: 30°C Ground Temperature: 15°C  
Soil Thermal resistivity: 1.2°Cm/W  
Depth of laying: 0.5 m

## Cables Constructions

### BS 5467 0.6/1KV Single Core Cu/XLPE/PVC/SWA/PVC

Nominal cross sectional area mm <sup>2</sup>	Nominal thickness of insulation mm	Thickness of bedding mm	Nominal AL wire armour dia. mm	Thickness of outer sheath mm	Approx. overall diameter mm	Approx. cable weight Kg/Km	Max. DC Resistance at 20°C Ohm/Km
50	1.0	0.8	0.9	1.5	16.5	1135	0.387
70	1.1	0.8	1.25	1.5	19.0	1525	0.268
95	1.1	0.8	1.25	1.6	21.0	1916	0.193
120	1.2	0.8	1.25	1.6	23.0	2418	0.153
150	1.4	1.0	1.6	1.7	25.5	2985	0.124
185	1.6	1.0	1.6	1.8	27.5	3422	0.0991
240	1.7	1.0	1.6	1.8	30.0	4641	0.0754
300	1.8	1.0	1.6	1.9	32.5	5282	0.0601
400	2.0	1.2	2.0	2.0	37.0	7049	0.0470
500	2.2	1.2	2.0	2.1	40.5	7645	0.0366
630	2.4	1.2	2.0	2.2	44.5	9681	0.0283
800	2.6	1.4	2.5	2.4	51.5	12090	0.0221
1000	2.8	1.4	2.5	2.5	56.5	14257	0.0176

### BS 5467 0.6/ 1 KV Two Core Cu/XLPE/PVC/SWA/PVC

1.5	0.7	0.8	0.9	1.3	12.0	409	12.1
2.5	0.7	0.8	0.9	1.4	13.0	465	7.41
4.0	0.7	0.8	0.9	1.4	14.0	567	4.61
6.0	0.7	0.8	0.9	1.4	15.0	679	3.08
10	0.7	0.8	0.9	1.5	17.0	846	1.83
16	0.7	0.8	1.25	1.5	19.5	1190	1.15
25	0.9	0.8	1.25	1.6	20.0	1265	0.727
35	0.9	1.0	1.6	1.7	22.0	1646	0.524
50	1.0	1.0	1.6	1.8	24.5	2065	0.387
70	1.1	1.0	1.6	1.9	27.0	2604	0.268
95	1.1	1.2	2.0	2.0	30.5	3506	0.193
120	1.2	1.2	2.0	2.1	33.0	4287	0.153
150	1.4	1.2	2.0	2.2	36.0	5041	0.124
185	1.6	1.4	2.5	2.4	40.5	6296	0.0991
240	1.7	1.4	2.5	2.5	44.0	8156	0.0754
300	1.8	1.6	2.5	2.6	47.5	9514	0.0601
400	2.0	1.6	2.5	2.8	53.0	11960	0.0470

### BS 5467 0.6/ 1 KV Three Core Cu/XLPE/PVC/SWA/PVC

1.5	0.7	0.8	0.9	1.3	12.5	437	12.1
2.5	0.7	0.8	0.9	1.4	13.5	502	7.41
4.0	0.7	0.8	0.9	1.4	14.5	623	4.61
6.0	0.7	0.8	0.9	1.4	15.5	744	3.08
10	0.7	0.8	1.25	1.5	18.5	1070	1.83
16	0.7	0.8	1.25	1.6	20.0	1330	1.15
25	0.9	1.0	1.6	1.7	23.0	1721	0.727
35	0.9	1.0	1.6	1.8	25.0	2111	0.524
50	1.0	1.0	1.6	1.8	27.5	2632	0.387
70	1.1	1.0	1.6	1.9	31.0	3385	0.268
95	1.1	1.2	2.0	2.1	35.0	4585	0.193
120	1.2	1.2	2.0	2.2	37.5	5617	0.153
150	1.4	1.4	2.5	2.3	42.0	7040	0.124
185	1.6	1.4	2.5	2.4	46.0	8286	0.0991
240	1.7	1.4	2.5	2.6	50.5	10769	0.0754
300	1.8	1.6	2.5	2.7	56.0	12797	0.0601
400	2.0	1.6	2.5	2.9	62.0	16043	0.0470


## Cables Constructions

### BS 5467 0.6/ 1 KV Four Core Cu/XLPE/PVC/SWA/PVC

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Thickness of bedding <b>mm</b>	Nominal armour wire <b>mm</b>	Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. cable weight <b>Kg/Km</b>	Max. DC Resistance at 20°C <b>Ohm/Km</b>
1.5	0.7	0.8	0.9	1.3	13.0	474	12.1
2.5	0.7	0.8	0.9	1.4	14.0	586	7.41
4.0	0.7	0.8	0.9	1.4	15.5	725	4.61
6.0	0.7	0.8	1.25	1.5	17.5	967	3.08
10	0.7	0.8	1.25	1.5	20.0	1265	1.83
16	0.7	0.8	1.25	1.6	22.0	1572	1.15
25	0.9	1.0	1.6	1.7	25.0	2074	0.727
35	0.9	1.0	1.6	1.8	27.0	2567	0.524
50	1.0	1.0	1.6	1.9	30.5	3236	0.387
70	1.1	1.2	2.0	2.1	35.0	4538	0.268
95	1.1	1.2	2.0	2.2	38.5	5859	0.193
120	1.2	1.4	2.5	2.3	43.5	7459	0.153
150	1.4	1.4	2.5	2.4	46.5	8835	0.124
185	1.6	1.4	2.5	2.6	51.5	10965	0.0991
240	1.7	1.6	2.5	2.7	57.5	13522	0.0754
300	1.8	1.6	2.5	2.9	62.5	16489	0.0601
400	2.0	1.8	3.15	3.2	71.5	21046	0.0470

### BS 5467 0.6/ 1KV Four Core with Reduced Neutral Cu/XLPE/PVC/SWA/PVC

Nominal cross sec. area Phase <b>mm<sup>2</sup></b>	Nominal cross sec. area Neutral <b>mm<sup>2</sup></b>	Nominal thickness of insulation Phase <b>mm</b>	Nominal thickness of insulation Neutral <b>mm</b>	Thickness of bedding <b>mm</b>	Nominal armour wire dia. <b>mm</b>	Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. cable weight <b>Kg/Km</b>	Max. DC Resistance at 20°C <b>Ohm/Km</b>
25	16	0.9	0.7	1.0	1.6	1.7	24.5	1990	0.727
35	16	0.9	0.7	1.0	1.6	1.8	27.0	2399	0.524
50	25	1.0	0.9	1.0	1.6	1.9	29.0	2930	0.387
70	35	1.1	0.9	1.2	2.0	2.0	33.5	4157	0.268
95	50	1.1	1.0	1.2	2.0	2.1	37.0	5357	0.193
120	70	1.2	1.1	1.2	2.0	2.2	40.5	6473	0.153
150	70	1.4	1.1	1.4	2.5	2.4	45.5	7896	0.124
185	95	1.6	1.1	1.4	2.5	2.5	49.5	9932	0.0991
240	120	1.7	1.2	1.6	2.5	2.6	55.0	12155	0.0754
300	150	1.8	1.4	1.6	2.5	2.8	60.5	14982	0.0601
400	185	2.0	1.6	1.6	2.5	3.0	66.5	18116	0.0470

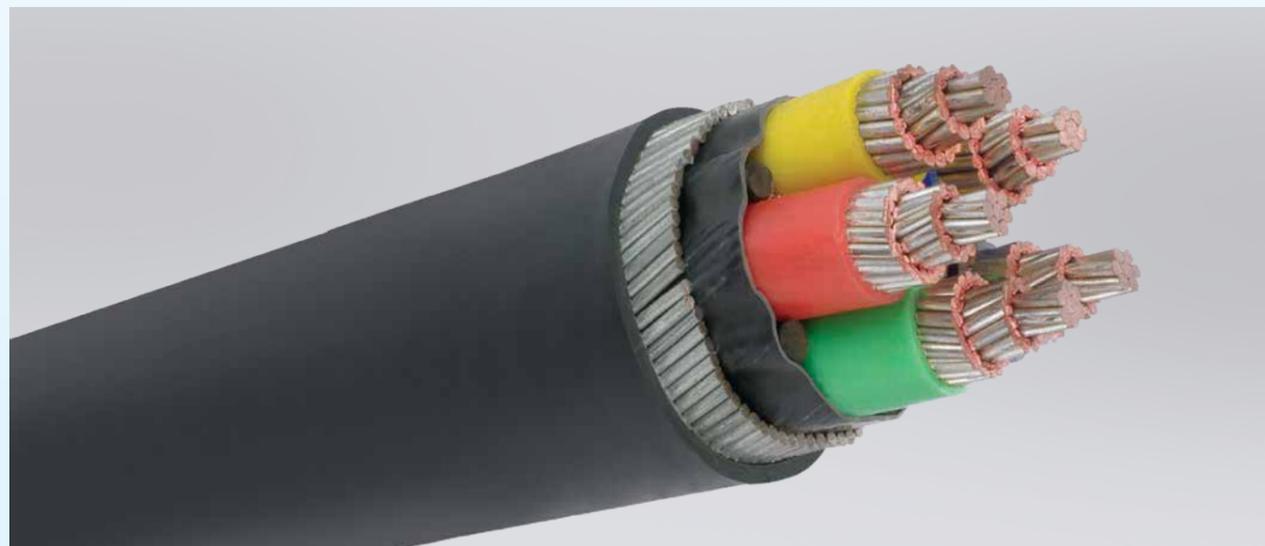

## Cables Constructions

### BS 5467 0.6/1 KV Control Cables Cu/XLPE/PVC/SWA/PVC

Nominal cross sectional area <b>mm<sup>2</sup></b>	No. of cores	Nominal thickness of insulation <b>mm</b>	Thickness of bedding <b>mm</b>	Nominal armour wire diameter <b>mm</b>	Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. cable weight <b>Kg/Km</b>	Max. DC Resistance at 20°C <b>Ohm/Km</b>
1.5	7	0.7	0.8	0.9	1.4	15.2	430	12.1
1.5	12	0.7	0.8	1.25	1.5	19.4	720	12.1
1.5	19	0.7	0.8	1.25	1.6	22.2	945	12.1
1.5	27	0.7	1.0	1.6	1.7	26.7	1405	12.1
1.5	37	0.7	1.0	1.6	1.7	29.0	1685	12.1
1.5	48	0.7	1.0	1.6	1.8	32.7	2040	12.1
2.5	7	0.7	0.8	0.9	1.4	17.1	555	7.41
2.5	12	0.7	0.8	1.25	1.6	22.4	950	7.41
2.5	19	0.7	1.0	1.6	1.7	26.6	1440	7.41
2.5	27	0.7	1.0	1.6	1.8	30.7	1860	7.41
2.5	37	0.7	1.0	1.6	1.8	33.8	2270	7.41
2.5	48	0.7	1.2	2.0	2.0	39.3	3105	7.41
4.0	7	0.7	0.8	1.25	1.5	19.7	820	4.61
4.0	12	0.7	1.0	1.6	1.6	25.7	1365	4.61
4.0	19	0.7	1.0	1.6	1.7	29.3	1820	4.61
4.0	27	0.7	1.0	1.6	1.9	34.4	2405	4.61
4.0	37	0.7	1.2	2.0	2.0	39.2	3315	4.61
4.0	48	0.7	1.2	2.0	2.1	44.1	4040	4.61



## PVC INSULATED ARMoured CABLES

- Application** – Indoors or Outdoors in cable ducts, cable trays, conduits or underground locations under mechanical stresses in power and switching stations.  
– Local distribution systems, Industrial and Commercial units for basic power & lighting purpose.

**Standards** BS 6346, IEC 60502-1 & VDE 0271

Operating Temperature	70° C
Short Circuit Temp.	160° C
Working Voltage	600 / 1000 Volts
Test Voltage	3.5 KV r m s for 5 minutes

### CONSTRUCTION

**Conductor** Aluminium / Annealed plain copper solid\* / stranded conductor conform to BS 6360 and IEC 60228, Class 2 (Circular / Sector shaped)

**Insulation** PVC type T11 as per BS 7655: Section 3.1 and PVC type A as per IEC 60502-1

Single core	Red or Black
2 Core	Red , Black
3 Core	Red , Yellow , Blue
4 Core	Red , Yellow, Blue, Black
5 Core	Red , Yellow, Blue, Black & Yellow - Green
6 Core & above	Black colour with number printing

**Assembly** Insulated conductors are laid up together, if necessary interstices may be filled with fillers.

**Fillers** Non-hygroscopic Poly propylene fillers are included between laid up cores wherever required

A separator tape of non-hygroscopic poly propylene material is applied over laid up cores wherever necessary.

**Bedding** Extruded PVC compatible with operating temperature.

**Armour** For Single Core - Aluminium round wire / flat wire.  
For Multicore - Galvanised Steel round wire / flat wire / tape.

**Outer Sheath** Extruded PVC / Special PVC compound such as Flame Retardant (FR), Flame Retardant Low Smoke (FRLS), Low Smoke Zero Halogen (LSOH) can be used for outer sheath to suit a variety of environment and fire risk conditions. Flamability test confirms to IEC 332 & Swidish chimney. For installation where fire and associated problems such as emission of smoke and toxic fumes offer a serious potential threat, special LSF (Low smoke & fumes) compound can be provided. LSF compound is Halogen free (Flourine, Chlorine, Bromine) when tested as per BS 6425 (Pt 1) & IEC 60754 (Pt 1). The acid gas evolved during combustion is less than 0.5% by weight of material.

**Minimum Bending radius** :12 times the cable diameter

**Admissible Pulling Force** : Aluminium - 30N/mm<sup>2</sup>

## Cables Constructions

### BS 6346 0.6/ 1 KV Single Core Cu/PVC/PVC/SWA/PVC

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Thickness of bedding <b>mm</b>	Nominal AL armour wire diameter <b>mm</b>	Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. cable weight <b>Kg/Km</b>	Max. DC Resistance at 20°C <b>Ohm/Km</b>
50	1.4	0.8	1.25	1.5	18.5	780	0.387
70	1.4	0.8	1.25	1.6	20.5	1005	0.268
95	1.6	0.8	1.25	1.6	22.5	1288	0.193
120	1.6	1.0	1.6	1.7	26.0	1654	0.153
150	1.8	1.0	1.6	1.7	27.0	1969	0.124
185	2.0	1.0	1.6	1.8	29.5	2375	0.0991
240	2.2	1.0	1.6	1.9	32.5	2983	0.754
300	2.4	1.0	1.6	1.9	35.0	3607	0.0601
400	2.6	1.2	2.0	2.1	40.0	4794	0.0470
500	2.8	1.2	2.0	2.1	43.5	5848	0.0366
630	2.8	1.2	2.0	2.2	47.5	7154	0.0283
800	2.8	1.4	2.5	2.4	53.5	9087	0.0221
1000	3.0	1.4	2.5	2.5	59.5	11162	0.0176

### BS 6346 0.6/ 1 KV Two Core Cu/PVC/PVC/SWA/PVC

1.5	0.8	0.8	0.9	1.4	12.0	258	12.1
2.5	0.8	0.8	0.9	1.4	13.5	311	7.41
4.0	1.0	0.8	0.9	1.4	15.0	431	4.61
6.0	1.0	0.8	0.9	1.5	16.0	516	3.08
10	1.0	0.8	1.25	1.6	20.0	826	1.83
16	1.0	0.8	1.25	1.6	22.0	1021	1.15
25	1.2	1.0	1.6	1.7	22.0	1208	0.727
35	1.2	1.0	1.6	1.8	24.0	1467	0.524
50	1.4	1.0	1.6	1.9	26.5	1864	0.387
70	1.4	1.0	1.6	1.9	28.5	2319	0.268
95	1.6	1.2	2.0	2.1	33.0	3187	0.193
120	1.6	1.2	2.0	2.2	35.5	3758	0.153
150	1.8	1.2	2.0	2.3	38.5	4485	0.124
185	2.0	1.4	2.5	2.4	43.5	5709	0.0991
240	2.2	1.4	2.5	2.5	47.0	6998	0.0754
300	2.4	1.6	2.5	2.7	51.5	8437	0.0601
400	2.6	1.6	2.5	2.9	56.5	10592	0.0470

### BS 6346 0.6/ 1 KV Three Core Cu/PVC/PVC/SWA/PVC

1.5	0.8	0.8	0.9	1.4	12.5	287	12.1
2.5	0.8	0.8	0.9	1.4	14.0	357	7.41
4.0	1.0	0.8	0.9	1.4	15.5	490	4.61
6.0	1.0	0.8	1.25	1.5	17.5	689	3.08
10	1.0	0.8	1.25	1.6	21.0	957	1.83
16	1.0	0.8	1.25	1.6	23.0	1212	1.15
25	1.2	1.0	1.6	1.7	25.0	1577	0.727
35	1.2	1.0	1.6	1.8	26.5	1911	0.524
50	1.4	1.0	1.6	1.9	30.5	2522	0.387
70	1.4	1.2	2.0	2.0	34.0	3410	0.288
95	1.6	1.2	2.0	2.1	38.0	4349	0.193
120	1.6	1.2	2.0	2.2	40.5	5149	0.153
150	1.8	1.4	2.5	2.4	46.0	6648	0.124
185	2.0	1.4	2.5	2.5	50.0	7893	0.0991
240	2.2	1.6	2.5	2.6	54.5	9768	0.0754
300	2.4	1.6	2.5	2.8	61.0	11906	0.0601
400	2.6	1.6	2.5	3.0	66.5	14996	0.0470

Note : Unarmoured cables construction details available upon request.

\*Aluminium - upto 10 mm<sup>2</sup> Copper - upto 6 mm<sup>2</sup>

\*\*Modification which serve to improve our products will be implemented without notice.


## PVC Insulated Armoured Cables

### BS 6346 0.6/ 1 KV Four Core Cu/PVC/PVC/SWA/PVC

Nominal cross sectional area <b>mm<sup>2</sup></b>	Nominal thickness of insulation <b>mm</b>	Thickness of bedding <b>mm</b>	Nominal armour wire <b>mm</b>	Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. cable weight <b>Kg/Km</b>	Max. DC Resistance at 20°C <b>Ohm/Km</b>
1.5	0.8	0.8	0.9	1.4	13.5	329	12.1
2.5	0.8	0.8	0.9	1.4	15.0	411	7.41
4.0	1.0	0.8	1.25	1.5	18.0	670	4.61
6.0	1.0	0.8	1.25	1.5	19.0	806	3.08
10	1.0	0.8	1.25	1.6	22.5	1125	1.83
16	1.0	1.0	1.6	1.7	26.5	1623	1.15
25	1.2	1.0	1.6	1.8	27.0	1917	0.727
35	1.2	1.0	1.6	1.9	28.5	2364	0.524
50	1.4	1.2	2.0	2.0	34.0	3358	0.387
70	1.4	1.2	2.0	2.1	36.5	4238	0.268
95	1.6	1.2	2.0	2.2	41.5	5459	0.193
120	1.6	1.4	2.5	2.4	44.5	6545	0.153
150	1.8	1.4	2.5	2.5	49.5	8274	0.124
185	2.0	1.6	2.5	2.6	55.0	9989	0.0991
240	2.2	1.6	2.5	2.8	61.0	12436	0.0754
300	2.4	1.6	2.5	3.0	67.0	15141	0.0601
400	2.6	1.8	3.15	3.3	76.0	20181	0.0470

### BS 6346 0.6/ 1 KV Four Core with Reduced Neutral Cu/PVC/PVC/SWA/PVC

Nominal cross sec. area Phase <b>mm<sup>2</sup></b>	Nominal cross sec. area Neutral <b>mm<sup>2</sup></b>	Nominal thickness of insulation Phase <b>mm</b>	Nominal thickness of insulation Neutral <b>mm</b>	Thickness of bedding <b>mm</b>	Nominal armour wire dia. <b>mm</b>	Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. cable weight <b>Kg/Km</b>	Max. DC Resistance at 20°C <b>Ohm/Km</b>
25	16	1.2	1.0	1.0	1.6	1.8	26.0	1799	0.727
35	16	1.2	1.0	1.0	1.6	1.8	27.5	2127	0.524
50	25	1.4	1.2	1.0	1.6	1.9	31.5	2807	0.387
70	35	1.4	1.2	1.2	2.0	2.0	35.5	3830	0.268
95	50	1.6	1.4	1.2	2.0	2.2	40.0	4966	0.193
120	70	1.6	1.4	1.4	2.5	2.3	44.0	6353	0.153
150	70	1.8	1.4	1.4	2.5	2.4	48.0	7445	0.124
185	95	2.0	1.6	1.4	2.5	2.5	52.5	8973	0.0991
240	120	2.2	1.6	1.6	2.5	2.7	59.0	11210	0.0754
300	150	2.4	1.8	1.6	2.5	2.9	64.0	13525	0.0601
400	185	2.6	2.0	1.8	3.15	3.1	71.5	17839	0.0470

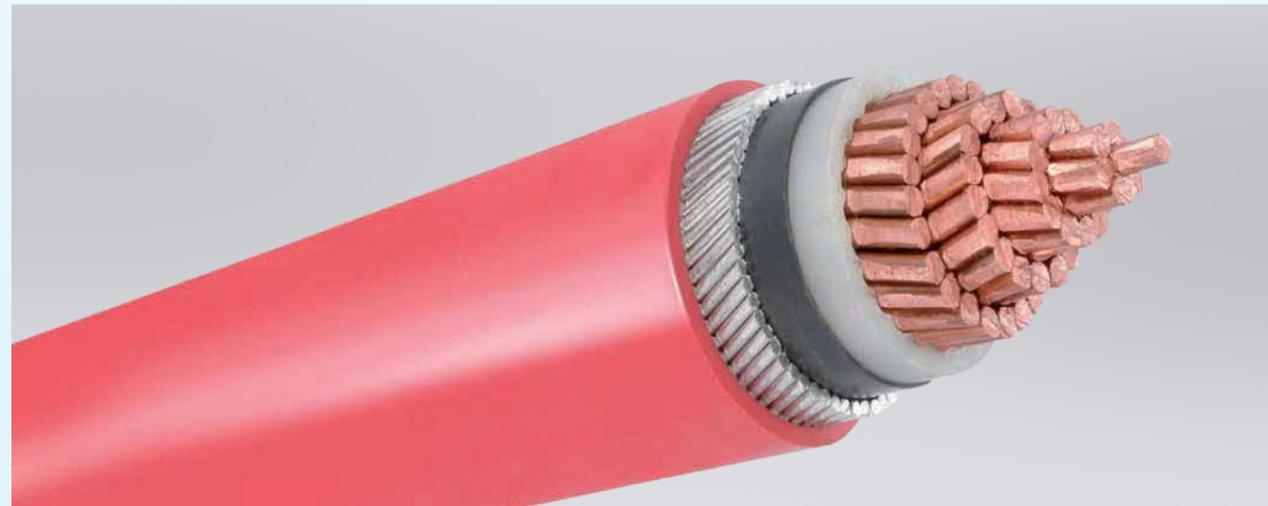

## Cables Constructions

### 0.6/1KV Auxilliary Cables Cu/PVC/PVC/SWA/PVC

Nominal cross sectional area <b>mm<sup>2</sup></b>	No. of cores	Nominal thickness of insulation <b>mm</b>	Thickness of bedding <b>mm</b>	Nominal armour wire diameter <b>mm</b>	Thickness of outer sheath <b>mm</b>	Approx. overall diameter <b>mm</b>	Approx. cable weight <b>Kg/Km</b>	Max. DC Resistance at 20°C <b>Ohm/Km</b>
1.5	7	0.8	0.8	0.9	1.4	15.2	450	12.1
1.5	12	0.8	0.8	1.25	1.5	19.4	750	12.1
1.5	19	0.8	0.8	1.25	1.6	22.2	990	12.1
1.5	27	0.8	1.0	1.6	1.7	26.7	1470	12.1
1.5	37	0.8	1.0	1.6	1.8	29.2	1790	12.1
1.5	48	0.8	1.0	1.6	1.9	32.9	2170	12.1
2.5	7	0.8	0.8	1.25	1.5	18.0	680	7.41
2.5	12	0.8	0.8	1.25	1.6	22.4	995	7.41
2.5	19	0.8	1.0	1.6	1.7	26.6	1505	7.41
2.5	27	0.8	1.0	1.6	1.8	30.7	1985	7.41
2.5	37	0.8	1.0	1.6	1.9	34.0	2410	7.41
2.5	48	0.8	1.2	2.0	2.1	39.5	3290	7.41
4.0	7	1.0	0.8	1.25	1.6	20.5	890	4.61
4.0	12	1.0	1.0	1.6	1.7	26.8	1510	4.61
4.0	19	1.0	1.0	1.6	1.8	30.5	2015	4.61
4.0	27	1.0	1.2	2.0	2.0	37.1	2940	4.61
4.0	37	1.0	1.2	2.0	2.1	40.8	3660	4.61
4.0	48	1.0	1.2	2.0	2.2	46.0	4485	4.61

### Current Ratings Copper Conductor PVC Insulated Armoured cable 600/1000 V

Conductor size <b>mm<sup>2</sup></b>	IN AIR				IN GROUND			
	Single Core		2-Core	3 or 4 Core	Single Core		2-Core	3 or 4 Core
	Trefoil <b>(A)</b>	Flat <b>(A)</b>	<b>(A)</b>	<b>(A)</b>	Trefoil <b>(A)</b>	Flat <b>(A)</b>	<b>(A)</b>	<b>(A)</b>
16	-	-	97	83	-	-	119	101
25	-	-	128	110	-	-	158	132
35	-	-	157	135	-	-	190	159
50	181	230	190	163	203	211	225	188
70	231	286	241	207	248	257	277	233
95	280	338	291	251	297	305	332	279
120	324	385	336	290	337	341	377	317
150	373	436	386	332	376	377	422	355
185	425	490	439	378	423	417	478	401
240	501	566	516	445	485	469	551	462
300	567	616	592	510	542	515	616	517
400	657	674	683	590	600	549	693	580



**INSULATED FIXED / FLEXIBLE CORDS & WIRES**

**Application** Installation in surface mounted or embedded conduits or similar closed systems, indoors, building wires, power cords and domestic electrical wiring purpose.

<b>Standards</b>	BS 6004, IEC 60227-3, BS 6007, BS 7919, BS 7211, BS 6231, BS 6141, BS 4737, BS 6500, <HAR>
<b>Operating Temperature</b>	70°C, 90°C
<b>Working Voltage</b>	300/500, 450/750 Volts
<b>Maximum Short Circuit Temperature</b>	160°C

**Test Voltage** After immerse in water for 12 hours test voltage applied for 5 minutes Thickness of insulation upto and including

0.7 mm	1.5 KV a.c.
0.7 mm to 1.0 mm	2.0 KV a.c.
1.0 mm and above	2.5 KV a.c.

**TYPE OF WIRES/CORDS** 2491LSF, 6491X, 6491LSF, 6241Y, 6242Y, 6243Y, 6181Y, 6181XY, 6181LSF, 318Y, 309Y, 218Y, 318LSF, 638TQ, 318TRS, 318TQ, 318XY, 380TQ, 680TQ,

**Conductor** Solid (class 1), Stranded (class 2), flexible (class 5), annealed copper conductor conforming to BS 6360 or IEC 60228

**Insulation** Poly Vinyl Chloride (PVC), Heat resistant (HR) PVC, Fire Retardant (FR) PVC, Fire Retardant Low Smoke (FRLS) PVC, Zero Halogen (LSOH), Thermosetting (XLPE, Rubber etc.)

**Colours** Green/Yellow, Blue, Red, Black, Grey, White, any other colours on request

**Sheath (Multicore)** Poly Vinyl Chloride (PVC), Heat resistant (HR) PVC, Fire Retardant (FR) PVC, Fire Retardant Low Smoke (FRLS) PVC, Zero Halogen (LSOH)

**Comparitive Properties**

Feature	HR PVC	FR-PVC	FRLS-PVC	LSOH
Temperature Rating	85°C	70°C	70°C	105°C
Requirement of Oxygen to catch Fire (% in air)	>21	>30	>30	>35
Temperature required to catch Fire Temp (with 21% in Oxygen)	Room Temp.	>250°C	>250°C	>300°C
Visibility during cable burning (%)	<20	<35	>40	>80
Release of Halogen Gas during burning (% by weight)	<20	<20	<20	ZERO
Flame Retardancy	Good	Very Good	Very Good	Excellent

FLEXIBLE & FLAT (RHINOS) 2, 3, 4, 6, 10, 12, 14, 16, 19, 24 & 27  
(Details available on request).



**Cables Constructions**

**6491x : Copper Conductor, PVC Insulated Unsheathed Wires**

Nominal cross section area of conductor <b>mm<sup>2</sup></b>	Number/Nominal dimeter of wires <b>No/mm</b>	Thickness of Insulation <b>mm</b>	Overall Diameter Max. <b>mm</b>	Current carrying capacity <b>Amps</b>	Resistance per Km at 20°C <b>Ohms</b>	Insulation resistance at 70°C <b>M ohm-km</b>
1.5	1/1.4	0.7	3.2	17.5	12.1	0.011
	7/0.53	0.7	3.3	17.5	12.1	0.010
	30/0.25	0.7	3.4	17.5	13.3	0.010
2.5	1/1.8	0.8	3.9	24	7.41	0.010
	7/0.67	0.8	4.0	24	7.41	0.009
	50/0.25	0.8	4.1	24	7.98	0.009
4.0	1/2.25	0.8	4.4	32	4.61	0.0085
	7/0.85	0.8	4.6	32	4.61	0.0077
	56/0.30	0.8	4.8	32	4.95	0.007
6.0	1/2.76	0.8	5.0	41	3.08	0.0070
	7/1.04	0.8	5.2	41	3.08	0.0065
	84/0.30	0.8	5.3	41	3.3	0.006
10	1/3.57	1.0	6.4	57	1.83	0.0070
	7/1.35	1.0	6.7	57	1.83	0.0065
	80/0.40	1.0	6.8	57	1.91	0.0056
16	7/170	1.0	7.8	76	1.15	0.0050
	126/0.40	1.0	8.1	76	1.21	0.0046
25	7/2.14	1.2	9.7	101	0.727	0.0050
	196/0.40	1.2	10.2	101	0.78	0.0044
35	7/2.58	1.2	10.9	125	0.524	0.0043
	276/0.40	1.2	11.7	125	0.554	0.0038
50	19/1.78	1.4	12.8	151	0.387	0.0043
	396/0.40	1.4	13.9	151	0.386	0.0037
70	19/2.14	1.4	14.6	192	0.268	0.0035
	360/0.50	1.4	16.0	192	0.272	0.0032
95	19/2.52	1.6	17.1	232	0.193	0.0035
	475/0.50	1.6	18.2	232	0.206	0.0032
120	37/2.03	1.6	18.8	269	0.153	0.0032
	608/0.50	1.6	20.2	269	0.161	0.0029
150	37/2.25	1.8	20.9	300	0.124	0.0032
	756/0.50	1.8	22.5	300	0.129	0.0029
185	37/2.52	2.0	23.3	341	0.099	0.0032
	925/0.50	2.0	24.9	341	0.106	0.0029
240	61/2.25	2.2	26.6	400	0.0754	0.0032
	1221/0.50	2.2	28.4	400	0.0801	0.0028
300	61/2.52	2.4	29.6	458	0.0601	0.0030
	61/2.85	2.6	33.2	546	0.0470	0.0028





## AERIAL BUNCHED CABLES

**Application:** Outdoor distribution in Rural or residential areas Offers cost effective safer and reliable cable for reticulation.

**Range:** LV Cables with XLPE, PVC or PE insulation MV cables with XLPE insulation

**Standard:** IS 14255, BS 7870-5, BS 625 HD 626, VDE 00276 P 626, IEC 60502 NF C 33-209

<b>Voltage:</b>	600/1000V, 11KV, 22KV
<b>Conductor:</b>	Hard Drawn Aluminium, aluminium alloy or copper

**Insulation:** Specially formulated for exposure to sunlight and outdoor application. LV XLPE or PE is loaded with carbon black MV cable insulated and screened cores are PVC sheathed

**Max Operating Temp:** XLPE: Max 90°C

PVC or PE: Max 70°C

**Construction:** Insulated cores may be bundled together or laid up around high tensile insulated or bare messenger. If a messenger is provided; as the tension is taken by it, phase conductors can operate at maximum allowable conductor temperature.

**Minimum Bending Radius:** For LV 10 times & MV 15 times cable diameter

**Solar Radiation:** 1000 W/ sq m

## Cables Constructions

### LV Cables

Conductor		Electrical Parameters			
Area (Sq. mm)	Strands	Current Rating In Air @ 30°C	Maximum DC Resistance @ 20°C	Reactance	Approx Breaking Load
		Amp	Ω/km	Ω/km	KN
16	7	87	1.91	0.091	2.84
25	7	107	1.20	0.087	4.17
35	7	132	0.868	0.085	5.78
50	7	165	0.641	0.083	8.45
70	19	205	0.443	0.0789	11.32
95	19	250	0.32	0.075	15.30
120	19	290	0.253	0.073	20.00
150	19	330	0.206	0.072	25.00

Current rating for max cond temp 80°C and wind velocity 1 km/hr



## KEI RUBBER CABLES

In Keeping with the company's commitment to technological advancement, elastomer materials such as Ethylene Propylene Rubber "EPR", Polychloroprene "PCP", Chloro Sulphonated Polyethylene "CSP" Nitrile Rubber / PVC Blends, Ethylene Vivyl Acetate "EVA" and Silicone Rubber have been specially compounded to meet numerous heat oil and fire resisting requirements. In the recent years KEI has also developed special Elastomeric Fire Survival Cables for power, control and instrumentation wiring.

Elastomeric compounds for insulating and sheathing of cables are formulated to meet the requirement of BS 6899, IEC 60502 and IEC 60092 other international specification.

### GENERAL CONSTRUCTION "Conforming to IS 9968 Part I"

<b>Conductor</b>	Annealed tinned Copper wires Solid "Class 1", Stranded "Class 2" flexible "Class 5" complying with the requirement of BS 6360/IE 60228
<b>Seperator Tape Insulation</b>	Suitable Material Seperator Tape may be applied over the conductor. General Service elastomer compound / Heat Resisting elastomer compound / Silicone rubber as per IEC 60092 "351", BS-7655, VDE-0207Pt.-20
<b>Core Identification</b>	Coloured insulation, Nos. Polyester tape, Coloured proofed tape, Nos. printing.
<b>Fillers</b>	Natural or synthetic fibers or elastomer suitable for the operating temperature and compatible with the insulating material.
<b>Sheath</b>	General Service elastomeric compound / Heavy Duty elastomeric compound as per IEC 60092 "359", BS-7655, VDE 0207Pt.-21

### Working Temperature of Commonly Used Elastomeric Insulating and Sheathing Material

MATERIAL	Max. Cond. Temp. for continuous operation <b>Deg C.</b>	Max. Cond. Temp. for short circuit <b>Deg C.</b>	Min. Working Temp. <b>Deg C.</b>
Natural Rubber (VIR and TRS)	60	200	-55
Ethylene Propylene Rubber (EPR)	90	250	-50
Polychloroprene (PCP)	70	200	-40
Chlorosupphonated Polyethylene (CSP)	90	200	-35
Silicone Rubber	150 / 180	350	-55
HR Nautral Ruber (HR VIR)	75	200	-55
Styrene Butadience Rubber	60	200	-55
Butyl Rubber	85	220	-50



Control Room Impulse Testing & Heat Cycle Test etc.

## Cables Constructions

Elastomeric Cables Range	Application
Cables up to 11 KV	Machine Trailing, Mining, Power
Flexible Trailing Cables	Reeling unreeling, Trailing, Festooning, Mobile Machines, Cranes, Coal Handling and Conveyors
Mining Cables	FT or Pliable Armoured or Landline type as per IS 14494, NCB, SABS specs for UG, Open cast, Coal or other mines and mining machines
Thermal Power Plants	For coal handling plants, flexible power and control application
Cables for steel plants	Flexible and high temp withstanding cables for furnace, melting shops, material handling
Wind energy	Flexible cables for power and control for Wind Mill generator connection
Fire Survival Cables	Fire Survival for 3 Hrs or 20 Min
Ship wiring	As per IEC specs and Naval specs DGS of DEFSTAN, NES
OFFSHORE and ONSHORE	For platforms and Ring as per IEC, BS and NEK Specs
Shore Supply & Generator Cables	For charging of ship batteries and supply from mobile generators
Motor Coil Leads	Elastomeric and Silicon as per IS, BS, or OEM Specs
High Temp Cables	Silicon insulated, glass fiber braided or unbraided
Pump Cables	For Water, submersible and sewerage pumps
Cables for Railway	Coach wiring, Metro railway
Wire	HFFR Low toxic emission under fire
Panel Wiring	For flexible, high power high temp zone, polluted or moist atmospheres
Battery Cables	For High current and long life
Low Temperature installations	Suitable for subzero temp installations and operations
Misc. Applications	outdoor high mast lighting, site power supply, white goods, oil or chemical resistant
Type	Power and Control cables up to 61 Crores Instrumentation Pairs 30 pairs, triads, quad Wires, flat cables
Voltage Grades	11KV, 6.6KV, 3.3KV, 1.1KV, 750V, 250V, 110V, 60V
Conductor Range	0.5 to 630 Sq. mm
Polymers Processed COMPOUNDS	EPR, EPDM, PCP, CSP, CPE, SILICONE, EVA HALOGEN FREE AND FIRE RESISTANT NON TOXIC COMPOUNDS
Braiding Offered	ATC, GI wire braid, Synthetics or Textile Yarn, Glass Fiber
Armouring	Pliable armour or steel/copper wires/Stainless steel



Mica Taping Machine



Braiding Machine

## CABLES FOR INSTRUMENTATION

KEI manufactures a wide variety of cables suitable for process instrumentation, which plays a vital role in measurement, supervision and control of the process. Introduction of microprocessor based / computerized instrumentation has demanded stringent quality requirements along with special electrical parameters for instrumentation cables.



The cables used for instrumentation are designed and manufactured very meticulously. KEI maintains high quality standards and follow & stringent in-process quality control during manufacturing of instrumentation cables, meeting the design parameters of the customer

<b>Conductor</b>	0.5 Sq. mm to 2.5 Sq mm of solid/stranded Tinned/untinne copper conductors.
<b>Insulation</b>	PVC/Polyethylene/XLPE/LSOH as per requirement.
<b>Elements / Core:</b>	Pair/Triad/Quad, colour coded / number printed.
<b>Screening</b>	Aluminium Polyester screen over all (collective) screen (OAS), individual screen (IS), or both IS & OAS with ATC drain wire. Wire braiding can also be given as per customer requirement.
<b>Element Laying</b>	Concentric formation or unit & group formation as per requirement.
<b>Armouring</b>	Unarmoured / Galvanised steel wire / Flat wire armoured.
<b>Sheathing</b>	PVC, FR PVC, FRLS, LSOH as per requirement.
<b>Specification</b>	EIL-6-52-46. Rev.05, BS: 5308 Part 1 & Part 2, BSC 143-0.75 (24/0.2 mm) OAS, IEC 60092-375, 376, BS EN 50288, VDE 0815, VG 95218, NEK 606 and customers Specifications.)



## Cables Constructions

Typical Instrumentation Cable Constructions

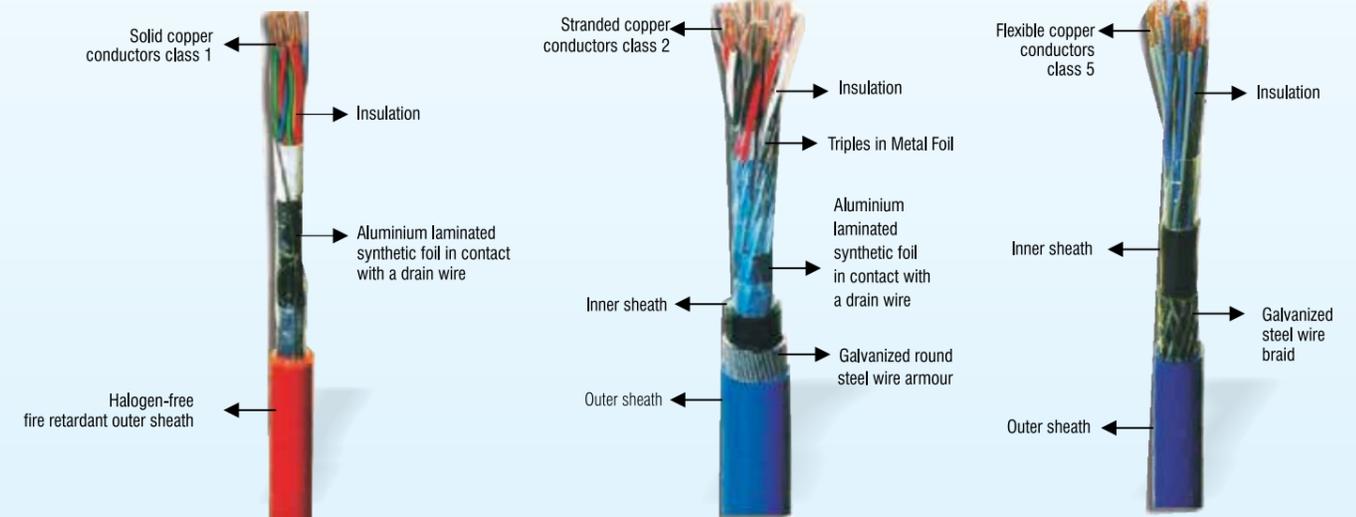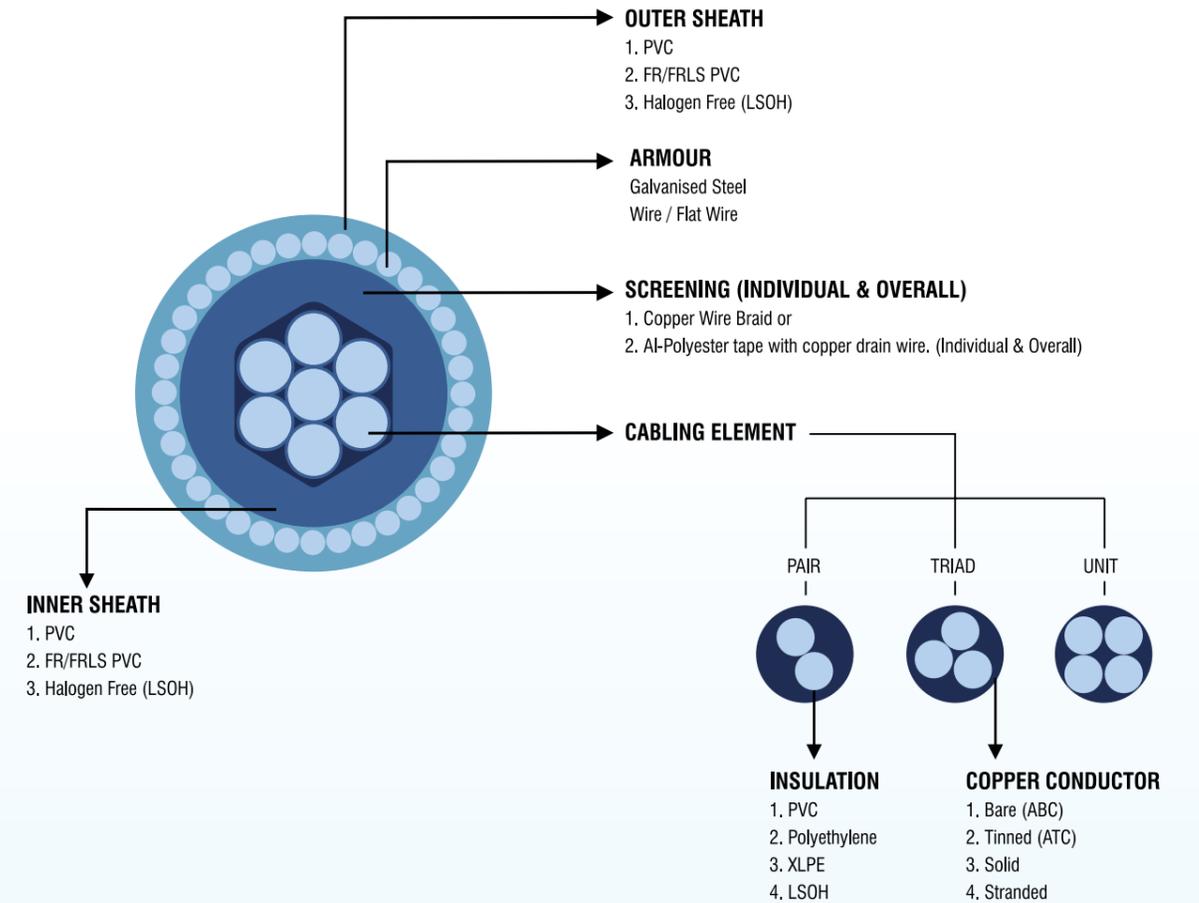

## THERMOCOUPLE EXTENSION / COMPENSATING CABLES

Thermocouple extension and compensating cables are designed for interconnection between thermocouple probes and control instrumentation. They are generally available in the following types:

### Type (1)

Unarmoured cables with conductors insulated with PVC and twisted together in pairs, sheathed overall with PVC.

### Type (2)


Armoured cables with conductors insulated with PVC and twisted together in pairs, PVC bedding, Galvanised steel wire armour and sheathed overall with PVC.

All of the above types of cables can be supplied unscreened or screened (individually, collectively or both) with an Aluminium Polyester tape screen incorporating tinned copper drain wire.


The construction is similar to paired instrumentation cable but the conductor material is different. Thermocouple are used in processes to sense temperature and is connected to the pyrometers for indication and control. The thermocouple and pyrometers are electrically connected by thermocouple extension/compensating cables. The conductors used for these cables are required to have similar thermo-electric (emf) properties as that of the thermocouple used for sensing the temperature.

### Range of Instrumentation Cables:

<b>Standard</b>	ANSI MC 96.1, BS-1843, IEC 60584-3, ENI
<b>Conductor</b>	Solid type as per type & mentioned in the table
<b>Insulation</b>	PVC/Polyethylene/XLPE/LSOH as per requirement.
<b>Elements</b>	Pairs colour coded/number printed.
<b>Screen</b>	Aluminium Polyester tape screen with Copper drain wire or alternately with Tinned Copper wire braiding. Individual element or overall screening as specified.
<b>Armouring</b>	Galvanised steel round wire / Flat wire.
<b>Sheathing</b>	PVC, FR PVC, FRLS, LSOH as per requirement.

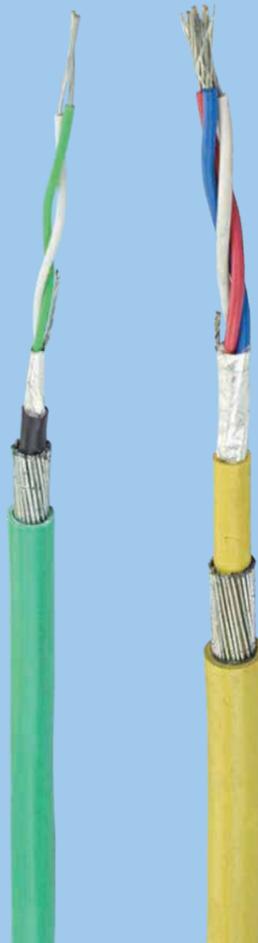

## SINGLE / MULTI CORE FIRE RESISTANT CABLES

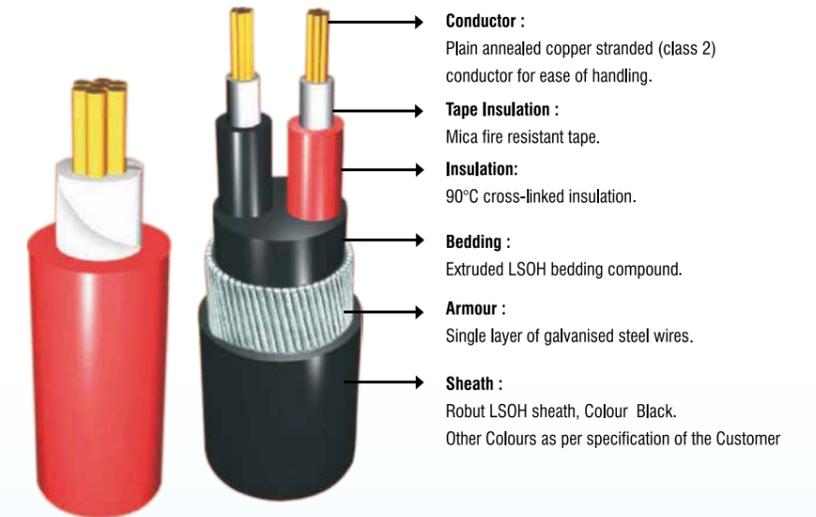

### Core Identification :

- Red Black
- Red Yellow Blue
- Black Red Yellow Blue
- 7- 37 Cores white with Printed numbers
- Other Core colors available as per customer specification

Cable Characteristics	
<b>TEMPERATURE</b>	Range 25 to + 90°C
<b>BENDING RADIUS</b>	Circular conductor r=6D Shaped conductor r=8D
<b>MECHANICAL IMPACT</b>	Very Good
<b>FIRE PERFORMANCE</b>	BS 4066-1, BS4066-3
<b>FLEXIBILITY</b>	Rigid
<b>HALOGEN FREE</b>	BS6425-1
<b>LOW SMOKE</b>	Emissions BS 7622
<b>FIRE RESISTANT</b>	BS 6387



## Cables Constructions

### Single Core Fire Resistant Cables Low Voltage - 450/750 Volts

Nominal cross sectional area <b>mm<sup>2</sup></b>	Mean overall diameter <b>mm</b>	Approximate cable weight <b>kg/km</b>	Maximum conductor resistance at 20°C <b>ohms/km (1 sec) KA</b>	Short circuit rating <b>Amps</b>	Current rating DC or single phase AC <b>Amps</b>	Current rating Three phase AC <b>Amps</b>	Volt drop DC <b>mV/A/m</b>	Volt drop Single phase AC <b>mV/A/m</b>	Volt drop Three phase AC <b>mV/A/m</b>
+1	3.7	20	18.1	0.1	17	15	46	46	40
1.5	3.9	26	12.1	0.15	22	19	31	31	27
2.5	4.7	38	7.41	0.25	30	26	19	19	16
4.0	5.3	54	4.61	0.4	40	35	12	12	10
6.0	5.9	75	3.08	0.6	51	45	7.9	7.9	6.8
10	7.3	122	1.83	1.0	71	63	4.7	4.7	4.0
16	8.5	185	1.15	1.6	95	85	2.9	2.9	2.5
25	11.3	300	0.727	2.5	126	111	1.85	1.9	1.65
35	12.5	390	0.524	3.5	156	138	1.35	1.35	1.15
50	14.5	525	0.387	5.0	189	168	0.99	1.05	0.9
70	16.5	730	0.268	7.0	240	214	0.68	0.75	0.65
95	18.5	1000	0.193	9.5	290	259	0.49	0.58	0.5
120	20.5	1230	0.153	12	336	299	0.39	0.48	0.42
150	22.5	1520	0.124	15	375	328	0.32	0.43	0.37
185	25	1890	0.0991	18	426	370	0.25	0.37	0.32
240	28	2440	0.0754	24	500	433	0.19	0.33	0.29
300	31	3045	0.0601	30	573	493	0.155	0.31	0.27
400	35	3870	0.047	40	683	584	0.12	0.29	0.25
500	38.5	4930	0.0366	50	783	666	0.093	0.28	0.24
630	42.5	6280	0.0283	63	900	764	0.072	0.27	0.23

### Multi Core Fire Resistant Cables Low Voltage - 600/1000 Volts

Nominal cross sectional area <b>mm<sup>2</sup></b>	Approximate overall diameter <b>mm</b>	Approximate diameter under armour <b>mm</b>	Nominal diameter of armour wires <b>mm</b>	Approximate cable weight <b>kg/km</b>	Maximum conductor resistance at 20°C <b>ohms/km</b>	Current rating DC or Single phase AC Clipped direct <b>Amps</b>	Current rating DC or Single phase AC Free Air <b>Amps</b>	Volt drop DC <b>mV/A/m</b>	Volt drop Single phase AC <b>mV/A/m</b>
<b>Two core</b>									
+1	12.2	7.8	0.9	280	18.1	18	21	47	47
1.5	12.9	8.3	0.9	310	12.1	27	29	31	31
2.5	14.1	9.6	0.9	380	7.41	36	39	19	19
4.0	15.2	10.6	0.9	450	4.61	49	52	12	12
6.0	16.4	12.0	0.9	530	3.08	62	66	7.9	7.9
10	18.6	14.0	0.9	630	1.83	85	90	4.7	4.7
16	21.4	15.9	0.9	920	1.15	110	115	2.9	2.9
25	22.0	16.3	1.25	1200	0.727	146	152	1.85	1.9
35	24.8	18.2	1.6	1600	0.524	180	188	1.35	1.35
50	28.0	21.2	1.6	2000	0.387	219	228	0.98	1.0
70	30.7	23.7	1.6	2400	0.268	279	291	0.67	0.69
95	35.3	27.3	2.0	3300	0.193	338	354	0.49	0.52
120	36.6	28.4	2.0	3800	0.153	392	410	0.39	0.42
150	39.3	30.9	2.0	4400	0.124	451	472	0.31	0.35
185	44.2	34.4	2.5	5700	0.0991	515	539	0.25	0.29
240	48.0	38.0	2.5	7200	0.0754	637	636	0.195	0.24
300	51.8	41.6	2.5	8300	0.0601	698	732	0.155	0.21
400	55.9	45.3	2.5	10500	0.047	787	847	0.12	0.19

## Single / Multi Core Fire Resistant Cables

### Three Core

Nominal cross sectional area <b>mm<sup>2</sup></b>	Approximate overall diameter <b>mm</b>	Approximate diameter under armour <b>mm</b>	Nominal diameter of armour wires <b>mm</b>	Approximate cable weight <b>kg/km</b>	Maximum conductor resistance at 20°C <b>ohms/km</b>	Short circuit rating (1 sec) of Conductor <b>KA</b>	Current rating Three phase AC Clipped direct <b>Amps</b>	Current rating Three phase AC Free Air <b>Amps</b>	Volt drop Three phase AC <b>mV/A/m</b>
+1	12.7	8.3	0.9	310	18.1	0.14	17	18	40
1.5	13.4	8.8	0.9	340	12.1	0.20	23	25	27
2.5	14.8	10.2	0.9	430	7.41	0.35	31	33	16
4.0	16.1	11.5	0.9	510	4.61	0.57	42	44	10
6.0	17.4	12.8	0.9	620	3.08	0.86	53	56	6.8
10	20.3	14.8	1.25	930	1.83	1.4	73	78	4.0
16	22.8	17.1	1.25	1210	1.15	2.2	94	99	2.5
25	27.4	20.8	1.6	1800	0.727	3.6	124	131	1.65
35	29.2	22.4	1.6	2100	0.524	5.0	154	162	1.15
50	33.0	26.2	1.6	2600	0.387	7.1	187	197	0.87
70	37.0	30.0	1.6	3400	0.268	10.0	238	251	0.60
95	40.6	32.4	2.0	4500	0.193	13.6	389	304	0.45
120	43.8	35.4	2.0	5500	0.153	17.2	335	353	0.37
150	48.0	38.4	2.5	6900	0.124	21.4	386	406	0.30
185	52.0	42.2	2.5	8200	0.0991	26.5	441	463	0.26
240	57.1	46.9	2.5	10200	0.0754	34.3	520	546	0.21
300	63.0	52.6	2.5	12200	0.0601	42.9	599	628	0.185
400	69.5	58.7	2.5	15000	0.0470	57.2	673	728	0.165

### Four core

Nominal cross sectional area <b>mm<sup>2</sup></b>	Approximate overall diameter <b>mm</b>	Approximate diameter under armour <b>mm</b>	Nominal diameter of armour wires <b>mm</b>	Approximate cable weight <b>kg/km</b>	Maximum conductor resistance at 20°C <b>ohms/km</b>	Short circuit rating (1 sec) of Conductor <b>KA</b>	Current rating Three phase AC Clipped direct <b>Amps</b>	Current rating Three phase AC Free Air <b>Amps</b>	Volt drop Three phase AC <b>mV/A/m</b>
+1	13.5	9.1	0.9	350	18.1	0.14	17	18	40
1.5	14.3	9.7	0.9	390	12.1	0.20	23	25	27
2.5	16.0	11.4	0.9	490	7.41	0.35	31	33	16
4.0	17.3	12.7	0.9	590	4.61	0.57	42	44	10
6.0	19.6	14.1	1.25	830	3.08	0.86	53	56	6.8
10	21.8	16.3	1.25	1040	1.83	1.4	73	78	4.0
16	24.6	18.9	1.25	1370	1.15	2.2	94	99	2.5
25	29.1	22.5	1.6	2100	0.727	3.6	124	131	1.65
35	32.2	25.4	1.6	2500	0.524	5.0	154	162	1.15
50	35.0	28.0	1.6	3200	0.387	7.1	187	197	0.87
70	40.2	32.0	2.0	4500	0.268	10.0	238	251	0.60
95	44.0	35.6	2.0	5600	0.193	13.6	289	304	0.45
120	48.4	38.8	2.5	7200	0.153	17.2	335	353	0.37
150	52.5	42.7	2.5	8500	0.124	21.4	386	406	0.30
185	57.1	46.9	2.5	10300	0.0991	26.5	441	463	0.26
240	62.7	52.3	2.5	12800	0.0754	34.3	520	546	0.21
300	69.6	58.8	2.5	15600	0.0601	42.9	599	628	0.185
400	78.0	65.3	3.15	20400	0.0470	57.2	673	728	0.165

Circular conductor 1.0-16mm<sup>2</sup>, Shaped conductor >= 25mm<sup>2</sup>.

## Cables Constructions

Nominal cross sectional area <b>mm<sup>2</sup></b>	Approximate overall diameter <b>mm</b>	Approximate diameter under armour <b>mm</b>	Nominal diameter of armour wires <b>mm</b>	Approximate cable weight <b>kg/km</b>	Maximum conductor resistance at 20°C <b>ohms/km</b>	Current rating DC or Single phase AC Clipped direct <b>Amps</b>	Current rating DC or Single phase AC Free Air <b>Amps</b>	Volt drop DC <b>mV/A/m</b>	Volt drop Single phase AC <b>mV/A/m</b>
---	---	--	---	--	--	--	--	-------------------------------	--

### Seven core

+1	15.6	11.0	0.9	450	18.1	18 *	21 *	47	47
1.5	16.4	11.8	0.9	500	12.1	27 *	29 *	31	31
2.5	18.3	13.7	0.9	640	7.41	36 *	39 *	19	19
4.0	20.8	15.3	1.25	910	4.61	49 *	52 *	12	12

### Twelve core

+1	20.1	14.6	1.25	750	18.1	18 *	21 *	47	47
1.5	21.2	15.7	1.25	850	12.1	27 *	29 *	31	31
2.5	24.0	18.3	1.25	1090	7.41	36 *	39 *	19	19
4.0	27.3	20.9	1.6	1550	4.61	49 *	52 *	12	12

### Nineteen core

+1	22.8	17.1	1.25	970	18.1	18 *	21 *	47	47
1.5	24.2	18.5	1.25	1120	12.1	27 *	29 *	31	31
2.5	28.6	22.0	1.6	1650	7.41	36 *	39 *	19	19

### Twenty-seven core

+1	27.7	21.1	1.6	1430	18.1	18 *	21 *	47	47
1.5	29.4	22.8	1.6	1650	12.1	27 *	29 *	31	31
2.5	33.4	26.6	1.6	2150	7.41	36 *	39 *	19	19

### Thirty-seven core

+1	30.6	23.7	1.6	1700	18.1	18 *	21 *	47	47
1.5	32.2	25.6	1.6	2000	12.1	27 *	29 *	31	31
2.5	36.7	29.9	1.6	2650	7.41	36 *	39 *	19	19

Circular conductor 1.0-16mm<sup>2</sup>, Shaped conductor  $\geq 25\text{mm}^2$ . Installation methods for current rating in accordance with BS7671/IEE Wiring Regulations \*.

The tabulated rating is as a two core cable and may be used where the number of cores carrying current does not exceed the square root of the total number of cores. +Size not included in BS7846

Installation methods for current rating "Enclosed in conduit on a wall or in trunking" in accordance with BS7671/IEE Wiring Regulations. The tabulated ratings are based upon a 30°C ambient temperature and 90° C operating temperature. For other ambient temperatures or where several circuits are grouped together, the following rating factor should be applied.

#### Temperature rating factors

Ambient Temperature °C	25	30	35	40	45	50	55	60
Rating factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71

#### Correction factors for groupings

Number of circuits	2	3	4	5	6	7	8	9
Rating factor	0.80	0.70	0.65	0.60	0.57	0.54	0.52	0.50

# KEI Industries Limited

REGISTERED AND CORPORATE OFFICE:

D-90, OKHLA INDUSTRIAL AREA PHASE-I, NEW DELHI-110020, TEL: +91-11-26818840/8642/0242 FAX: 26817225, 26811959

E-MAIL: info@kei-ind.com WEBSITE: www.kei-ind.com CIN NO: L74899DL1992PLC051527

## Manufacturing Units

### Bhiwadi

KEI Industries Limited  
SP-919/920/922, Ricco Industrial Area,  
Phase-III, Bhiwadi, Distt. Alwar-301019 Rajasthan  
Tel: +91-1493-220106/221731  
Fax: 221731 E-Mail: bhiwadi@kei-ind.com

### Pathredi

KEI Industries Limited  
Plot No.SP2-874, Ind. Area Pathredi-301019  
Bhiwadi (Alwar) Rajasthan (India) Tel: 9828588579

### Silvassa

KEI Industries Limited  
99/2/7, Madhubani Industrial Estate, Rakholi,  
Silvassa-396230 Dadra & Nagar Haveli  
Tel: +91-260-2644404/2630944  
Fax: 2645896 E-Mail: silvassa@kei-ind.com

### Chinchpada

KEI Industries Limited  
Survey No. 1/1/2/5, Village Chinchpada,  
Silvassa-396230, Dadra Nagar Haveli (UT)  
Tel: 7574881215 E-Mail: silvassa@kei-ind.com

### Chopanki

KEI Industries Limited  
A-280/281/282/283/284, Ricco Industrial Area  
(Chopanki) Distt. Alwar-301019 Rajasthan  
Tel: +91-1493-260202/06 Fax: 260203  
E-mail: chopanki@kei-ind.com

## Marketing Offices (India)

### WEST

#### Marketing Office-Mumbai

KEI Industries Limited  
Nirvan Corporate, 7th Floor, Opposite Aghadi Nagar,  
Pump House, Jijamata Road, Andheri East,  
Mumbai-400093  
Tel: +91-22-28239673, 28375642  
Fax: +91-22-28258277 E-mail: mumbai@kei-ind.com

#### Ahmedabad

KEI Industries Limited  
301, Sarthik Complex, Opp. ISCKON BRTS,  
Satellite Road, Ahmedabad-380015, Tel: 9825795673  
E-Mail: dharmin.maniar@kei-ind.com, ahmedabad@kei-ind.com

#### Pune

KEI Industries Limited  
Vasudha Equinox, Office No. 104, 1st Floor,  
Mouje Bopodi, Near Khadki Railway Station, Pune-411003  
Tel: 9922722378  
E-Mail: srivastav.prashant@kei-ind.com

#### Nagpur

KEI Industries Limited  
103, Misal Layout, Near Maharashtra School  
Nagpur - 440014 E-Mail: nagpur@kei-ind.com  
Mr. Saranjeet S. Kohli, Tel: +91-9822473774  
E-Mail: saranjeet.kohli@kei-ind.com

#### Kolhapur

KEI Industries Limited, 776/ 3/6 AmarnathHights Building,  
Near AmarnathMandir Ganesh Colony, Kalamba Road,  
Kolhapur - 416007  
Mr. Rajaram B. Kamble Tel: 9371104263 / 8291918940  
E-Mail: kolhapur@kei-ind.com, rajaram.kamble@kei-ind.com

### NORTH

#### Jaipur

KEI Industries Limited  
Shivam Business Center, 405, 4th Floor,  
Calgary Hospital Road, Pradhan Marg,  
Malviya Nagar, Jaipur - 302017 (Rajasthan)  
Phone No. + 91 141 5179279 Fax: +91 141 252 9404  
Tel: +91 99290 93711 E-Mail: jaipur@kei-ind.com

#### Panipat

KEI Industries Limited  
JP Tower, First Floor, Tau Devi Lal Complex  
Panipat-132013 Tel: +91-9050417107  
E-mail: shakti.sharma@kei-ind.com

### SOUTH

#### Chennai

KEI Industries Limited  
No.4, (Old. No. 23) SIR C P Ramasamy Road,  
2<sup>nd</sup> Floor, Near Apollo Spectra Hospital  
Alwarpet, Chennai-600018  
Tel: +91-44-42009120  
Fax: +91-44-42009130; 8939768405  
E-Mail: victor@kei-ind.com, chennai@kei-ind.com

#### Cochin

KEI Industries Limited  
Ward No.18/55 and 18/556, NAD Thorappu,  
Near Kuzhikkattukara Jama Masjid,  
Edathala, Emakulam, Kerala - 683563  
Tel: 9645096420, E-Mail: cochin@kei-ind.com

### EAST

#### Bhubaneswar

KEI Industries Limited  
Plot No- 139, 3rd Floor, Rose Dale District Centre,  
Chandrashekharpur, Bhubaneswar-751016, Odisha  
Tel: 9937033537  
E-Mail: odisha@kei-ind.com

#### Patna

KEI Industries Limited  
HIG Plot No-4H/59, Bahadurpur Housing Colony,  
Lohia Nagar, Agamkuan, Patna 800026, Bihar  
Tel: + 91 95348 38038, 7360042598  
E-Mail: bihar@kei-ind.com

## Marketing Office (Overseas)

#### Dubai

KEI Industries Limited  
Office -27, LOB 10, PO Box - 261739, JAFZA, Dubai UAE.  
Tel: +971-48812310, Fax: +971-48812311, Mobile: +971-564853435  
Email: dubai@kei-ind.com  
Contact: Mr. Devraj Tigaiya

#### South Africa

KEI Cables SA (Pty) Ltd.  
Unit 27-4, Fish Eagle View, 1 Benacre Lane,  
Modderfontein, 1609, South Africa  
Ms. Thavashnee Pillay +27 83 235 2895

#### Vapi/Silvassa/Daman

KEI Industries Limited  
A1/302, Karmabhumii Residency, Behind Golden  
Bakery, Nanakwada, Halar,  
Valsad-396001.  
Mr. Harsh Desai, Tel: 9723455316  
E-Mail: harsh.desai@kei-ind.com

#### Raipur

KEI Industries Limited  
206, 2nd Floor, Harshii Corporate, Amanaka,  
G.E. Road, Raipur, Chhattisgarh-492001  
Email: chhattisgarh@kei-ind.com  
Mr. Sumit Ganguly - 7581809898  
Email: sumit.ganguly@kei-ind.com

#### Goa

KEI Industries Limited  
House no: 617, Housing Board Colony,  
Camurlim Mapusa Goa 403507.  
E-Mail: goa@kei-ind.com  
Mr. Nilesh Parab - 9890452484  
E-Mail: nilesh.parab@kei-ind.com

#### Solapur

KEI Industries Limited  
Niranjan V. Deshpande  
462, Om Namah Shivay Nagar, Kumthe Road,  
Near Shastri Math, Hatture Vasti, Solapur, 413005  
Tel: 8291918937 E-Mail: niranjan@kei-ind.com

#### Rajkot

KEI Industries Limited  
Mr. Nitin Tank Tel: +91-8155044144  
E-Mail: nitin.tank@kei-ind.com

#### Lucknow

KEI Industries Limited  
E-79, 80, 81 Transport Nagar (Kanpur Road)  
Lucknow (UP)-226012 Tel: 0522-4010752  
E-Mail: up@kei-ind.com

#### Kanpur

KEI Industries Limited  
15/240 F, In Front of Hotel Attic, Civil Lines, Kanpur  
(UP)- 208001 Tel: 9935062910

#### Chandigarh

KEI Industries Limited  
SCO 17, 1st Floor, Swastik Vihar, MDC, Sector-5,  
Panchkula-134109 Tel: +91-172-4416301, 4416300,  
9872974996, 9872581422 E-Mail: chandigarh@kei-ind.com

#### Bangalore

KEI Industries Limited  
No 15, Sirur Park Road, Sheshadripuram,  
Bangalore-560020  
Tel: +91-80-23466254, +91-80-23466260/55  
Ph.: 8884439333 E-Mail: bangalore@kei-ind.com

#### Hyderabad

KEI Industries Limited  
Plot No. 76, H.No. 3-14-52/1, Shubodaya Colony,  
Near M.E Reddy Function Hall, Mansoorabad,  
Vanasthalipuram, Hyderabad-500070  
Tel: +91 88860 63702, +91 99855 77886  
E-Mail: hyderabad@kei-ind.com

#### Guwahati

KEI Industries Limited, Mangalam Plaza  
Compound, Near North East Weight Bridge, NH-37  
Bye Pass, Beltola, Guwahat-781029 Assam  
Rubul Gogoi - 8134846024, 9706050041  
E-Mail: rubul@kei-ind.com

#### Ranchi

KEI Industries Limited  
Golden Camp Warehouse, Old H B Road  
Kokar, Ranchi, Jharkhand - 834001  
Tel: 9810492658, 8918904901  
E-Mail: jharkhand@kei-ind.com

#### Singapore

KEI Industries Limited  
No.52, UBI Avenue 3, # 04-37 Frontier,  
Singapore-408867 Tel: +65 83240193  
Contact: Mr. Xavier Toh Hong Ghee  
E-mail: xavier@kei-sin.com

#### Nigeria

(Marketing Representative)  
E-mail: kunal.gupta@kei-ind.com  
Tel: +234 809 9777786

#### Nasik

KEI Industries Limited  
4, Sanket Apartment, Tidake Colony,  
Behind Hyundai Showroom, Nashik,  
Maharashtra-422002  
Tel: 9805369705 / 8291918949  
E-Mail: ghanshyam.pardeshi@kei-ind.com

#### Baroda

KEI Industries Limited  
803-804, Siddharth Complex, Near Hotel Express  
R.C. Dutt Road, Baroda-390007  
Tel: +91-265-6539719, 2341831, 9824676443,  
9327476732, E-Mail: baroda@kei-ind.com,  
amit.gohil@kei-ind.com

#### Surat

KEI Industries Limited  
703, Royal Trade Centre. Opposite Star Bazar,  
Adajan-Hazira Road, Adajan, Surat-395009  
Tel: 09879018448, +91-261-2793279  
E-Mail: rakesh.patel@kei-ind.com

#### Aurangabad

KEI Industries Limited  
Mahesh Pandurang Akalekar, Flat No. 11, Padmini Housing Society,  
Nakshtra Park, Beside Walmi Naka, Paithan Road,  
Aurangabad- 431 005  
Tel: 07045922707/706, 9075008151  
E-Mail: aurangabad@kei-ind.com, mahesh.akalekar@kei-ind.com

#### Noida

KEI Industries Limited A-43 Ground Floor, Sector-64,  
Noida, UP-201301 Tel: 0120-4315467

#### Indore

KEI Industries Limited  
Plot No 451 Sch No 78 Industrial Area New Loha Mandi  
Dewas Naka Indore 452010 (M.P.)Tel: 9826588885

#### Gurgaon

KEI Industries Limited  
Shop no-101 1st Floor, Radha Palace  
Gurudwara Road, Gurgaon Haryana-122001  
Tel: +919873561757 E-Mail: rkxingh@kei-ind.com

#### Dehradun

KEI Industries Limited  
H.No. - 329, Lane No- 13, Mohit Nagar,  
Dehradun - 248001 (U.K.), Ph.: 0135-2762223.  
Tel: 9756621171 E-mail: depotdehradun@kei-ind.com

#### Secunderabad

KEI Industries Limited  
5-2-510, 2nd floor, plot no: 44, Beside Govt Primary  
School, Near Bible House, Hyderabad, R.P. Road,  
Secunderabad, Telangana- 500003 Tel.: 8008000583,  
9963530111 E-Mail:Kiran.kumar@kei-ind.com

#### Coimbatore

KEI Industries Limited, SF.No. 581/A, K.N.G. Pudur Road,  
Kanuvai Post S.M. Palayam Village, Coimbatore-641108  
Tel: 9443324217, E-Mail: manohar.s@kei-ind.com

#### Vijayawada

KEI Industries Limited  
Venkata Ramana Enclave, D.No. 48-18-2a/1,  
2nd Floor -Nagarjuna Nagar Colony, 6th Lane, Behind  
Sai Baba Temple, Besides Ayush Hospital Krishna  
Dist. Andhra Pradesh-520008 Tel: 8886063715  
E-Mail: syed.mahamood@kei-ind.com

#### Kolkata

KEI Industries Limited  
Arihanth Benchmark, 4th Floor 113-F Matheshwartola  
Road Ps:Tijjala, Kolkata: 700046  
Tel: 033-4062 0820 / 4062 0822, 9932449183  
E-Mail: kolkata@kei-ind.com

#### Siliguri

KEI Industries Limited, 8, Balai Das Chatterjee Road,  
Ground Floor, Hakimpura, (Opp. Relief Physiotherapy  
Centre) Dist-Darjeeling, Siliguri-734001, West Bengal  
Tel: 8292209825, E-Mail: dibyoyoty.karmakar@kei-ind.com

#### Korea (Local Representative)

Contact: Mr. CH Han  
E-mail: ch.han@kei-ind.com  
Tel: +82-10-4351-8585  
Mr. TH Park  
E-mail: th.park@kei-ind.com Contact: +82-10-9104-4519