




KEI[®]
Wires & Cables

HOUSE WIRES

Your Home's Guardian Angel!

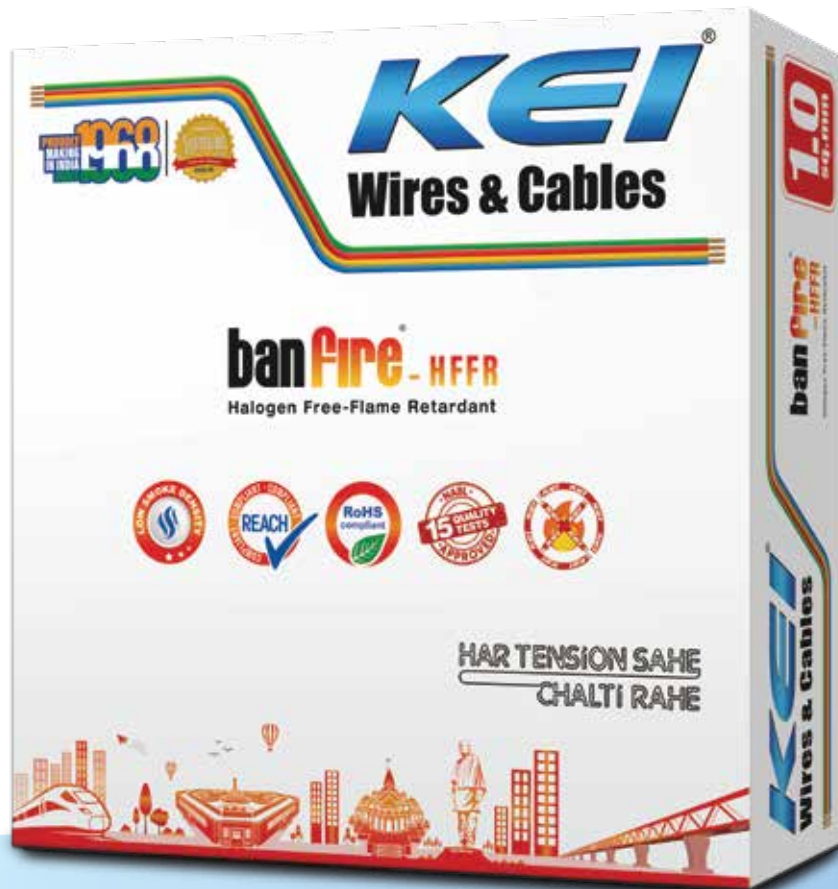

HAR TENSION SAHE
CHALTI RAHE

Toll Free No: 1800 410 0000

www.kei-ind.com      /keicables

CMD'S MESSAGE

KEI Industries, an Indian MNC founded in 1968, is a global leader in wire and cable solutions having an extensive range of world-class products and services. With multiple robust & cutting edge manufacturing facilities and a vast network of more than 30,000 retail touch points, KEI serves clients in 60+ countries, establishing itself as a one-stop-shop for comprehensive wire and cable solutions. The company achieved a turnover of INR 11,748 Crore in the fiscal year 2025-26.

As the world faces the pressing challenges of global warming and climate change, KEI Industries is dedicated to leading the way towards a sustainable and a carbon-neutral future. Our

dedication involves using clean gas and solar energy, alongside advanced air and water treatment systems, to eliminate hazardous chemicals and ensure a safe, sustainable environment. Our diverse array of products also reflects our strong commitment towards building an eco-friendly efficient surrounding. With an ongoing focus on innovation, KEI is positioned to lead in sustainability while meeting the demands of global consumers through using cutting-edge technologies, driving progress and setting new standards for environmental responsibility.

STATE OF THE ART MANUFACTURING 7 UNITS



BHIWADI
RAJASTHAN



CHOPANKI
RAJASTHAN



PATHREDI-1
RAJASTHAN



PATHREDI-2
RAJASTHAN



RAKHOLI
DADRA AND NAGAR
HAVELI




CHINCHPADA
DADRA AND NAGAR
HAVELI



SANAND
GUJARAT

BUILDING THE NATION...! PRESTIGIOUS PROJECTS WIRED BY KEI



RAM MANDIR



**WORLD'S TALLEST
STATUE OF UNITY**



**WORLD'S
LARGEST NARENDRA
MODI STADIUM**



**PARLIAMENT OF
INDIA**



**KONKAN RAILWAY
PROJECT**



**INDIA'S LONGEST
BOGIBEEL BRIDGE**



BULLET TRAIN



**INDIAN INSTITUTE
OF TECHNOLOGY
BOMBAY**




**AIROLI-KATAI
NAKA TUNNEL**



**MUMBAI COASTAL
ROAD MEGA PROJECT**



MUMBAI MONORAIL



**MUMBAI NAGPUR
SAMRUDDHI HIGHWAY**

banFire®

- HFFR

Halogen Free-Flame Retardant

CONDUCTOR: The conductors, drawn from bright electrolytic grade copper and annealed and bunched together.

INSULATION: The bunched conductors are insulated with specially formulated grade of Halogen Free Flame Retardant (HFFR) compound is used. The insulation does not melt or drop in case of fire. The smoke emitted is transparent, non-toxic and minimal. The victims trapped in the fire do not suffocate and evacuation is convenient.

MARKING: The cables are printed with generic marking 'BANFIRE'.

COLORS: Red, Yellow, Blue, Black, Green and Grey.

PACKING: 90 Meters (apprx.100 yards) pack in protective cartons.

KEI Banfire is processed using a Halogen Free Flame Retardant compound (HFFR). The insulation is of superior quality, 100% PVC free and eco-friendly. In case of a fire situation, Banfire does not emit toxic or poisonous fumes, which enables safe evacuation. These wires are best suited for wiring in hospitals, hotels, business establishments and high rise buildings where fire can be determined. So, give yourself the promise of security and supreme quality. Get KEI house wires and safeguard your home for life.

SIZE DIMENSIONS AND RATINGS

Nominal Cross Sectional Area of Conductor	Number/Nominal Dia of wires *[Nom.]	Thickness of insulation [Nom.]	Overall Diameter Max.	Current Rating		D.C Resistance [Max.] at 20 °C
				Clipped Direct/Cable Tray	Conduit/Trunking	
Sq.mm	Number/mm	mm	mm	amps	amps	Ohm/km
0.75	24/0.2	0.6	2.8	8	7	26.0
1.00	32/0.2	0.6	3.0	13	12	19.5
1.50	30/0.25	0.6	3.4	17	14	13.3
2.50	50/0.25	0.7	4.1	23	19	7.98
4.00	56/0.3	0.8	4.8	31	25	4.95
6.00	84/0.3	0.8	5.3	39	33	3.30

*The number & diameter of conductor strands are for reference only and governed by conductor resistance.
*The above data is indicative only and may be revised without prior information. KEI will not be responsible for any damages arising out of incorrect application of its product.

HALOGEN FREE
FLAME RETARDANT
70°C TEMP MAX OPERATING
THERMOPLASTIC INSULATION
RoHS COMPLIANT
REACH COMPLIANT



conFlame®

- FR-LSH

Flame Retardant Low Smoke & Halogen

CONDUCTOR: The conductors, drawn from bright electrolytic grade copper and annealed and bunched together.

INSULATION: The bunched conductors are insulated with specially formulated Flame Retardant Low Smoke Compound. During a fire situation, the FR-LSH compound restricts the spread of flame. The smoke emission is also minimal.

MARKING: The cables are printed with generic marking 'CONFLAME'.

COLORS: Red, Yellow, Blue, Black, Green and Grey.

PACKING: 90 Meters (apprx.100 yards) pack in protective cartons.

KEI's innovative offering Conflame is ideal for wiring solutions in multi-storied buildings, hotels, hospitals, commercial establishments and residential complexes. It is shielded by a specially formulated flame retardant PVC compound. During fire, ordinary PVC emits black smoke and toxic fumes which are acidic in nature. This impairs visibility and hampers rescue operations. Conflame insulation retards spread of fire and emits minimum smoke and toxic gases. Thereby reducing the risk of injury. So, give yourself the promise of security and supreme quality. Get KEI house wires and safeguard your home for life.

SIZE DIMENSIONS AND RATINGS

Nominal Cross Sectional Area of Conductor	Number/Nominal Dia of wires *[Nom.]	Thickness of insulation [Nom.]	Overall Diameter Max.	Current Rating		D.C Resistance [Max.] at 20 °C
				Clipped Direct/Cable Tray	Conduit/Trunking	
Sq.mm	Number/mm	mm	mm	amps	amps	Ohm/km
0.75	24/0.2	0.6	2.8	10	9	26.0
1.00	32/0.2	0.6	3.0	16	14	19.5
1.50	30/0.25	0.6	3.4	21	17	13.3
2.50	50/0.25	0.7	4.1	28	23	7.98
4.00	56/0.3	0.8	4.8	38	31	4.95
6.00	84/0.3	0.8	5.3	48	40	3.30

*The number & diameter of conductor strands are for reference only and governed by conductor resistance.
*The above data is indicative only and may be revised without prior information. KEI will not be responsible for any damages arising out of incorrect application of its product.

FLAME RETARDANT
LOW SMOKE & HALOGEN
PVC INSULATED
SINGLE CORE
UNSHEATHED
COPPER CABLES
(UP TO 1100 VOLTS AC)

Test	Specification	Specified Values
Critical Oxygen Index	ASTM-D 2863	Minimum 29%
Temperature Index	ASTM-D 2863	Minimum 250 °C
Acid Gas Generation	IEC 60754-1	Maximum 20%
Smoke Density Rating	ASTM-D 2843	Maximum 60%





BRIDGING THE GAP ACROSS 60+ DIFFERENT COUNTRIES



THE POWER BEHIND THE POWER



Scan to reach other offices

KEI Industries Limited

REGISTERED AND CORPORATE OFFICE:

D-90, OKHLA INDUSTRIAL AREA PHASE-I, NEW DELHI-110020, TEL: +91-11-26818840/8642/0242 FAX: 26817225, 26811959
E-MAIL: info@kei-ind.com WEBSITE: www.kei-ind.com Toll Free no: 1800 410 0000 CIN NO: L74899DL1992PLC051527

